

CHAPTER 4
SI UNIT PROBLEMS
SOLUTION MANUAL

SONNTAG • BORGNAKKE • VAN WYLEN



FUNDAMENTALS
of
Thermodynamics
Sixth Edition

CONTENT

SUBSECTION	PROB NO.
Correspondence table	
Concept problems	1-19
Force displacement work	20-30
Boundary work: simple one-step process	31-46
Polytropic process	47-58
Boundary work: multistep process	59-70
Other types of work and general concepts	71-81
Rates of work	82-94
Heat transfer rates	95-105
Review problems	106-116
English unit concept problems	117-122
English unit problems	123-143

CHAPTER 4 6th ed.
CORRESPONDANCE TABLE

The new problem set relative to the problems in the fifth edition.

New	5th	New	5th	New	5th
20	1	53	new	86	new
21	2mod	54	19	87	new
22	new	55	20	88	new
23	New	56	33 mod	89	43
24	New	57	37	90	new
25	3	58	36	91	New
26	4	59	15	92	new
27	new	60	30	93	new
28	New	61	6	94	New
29	new	62	New	95	47 HT
30	New	63	32	96	48 HT
31	New	64	7	97	49 HT
32	18	65	9	98	50 HT mod
33	27	66	34	99	51 HT mod
34	new	67	10	100	52 HT
35	new	68	New	101	53 HT
36	5	69	New	102	54 HT
37	new	70	26	103	55 HT
38	New	71	39	104	56 HT
39	13	72	New	105	57 HT
40	new	73	40	106	31 mod
41	new	74	New	107	11
42	New	75	New	108	16
43	New	76	New	109	17
44	New	77	New	110	23
45	22	78	58	111	21 mod
46	45 mod	79	59	112	28
47	8	80	60	113	29
48	12	81	61	114	24
49	14	82	New	115	44
50	New	83	New	116	35
51	New	84	New		
52	New	85	New		

The English unit problem set is

New	5th	New	5th	New	5th
117	new	126	New	135	69
118	new	127	new	136	73
119	new	128	62	137	72
120	new	129	67	138	76
121	new	130	70	139	63
122	new	131	new	140	new
123	new	132	66	141	77
124	68	133	65	142	78
125	64	134	75	143	79

The computer, design and open-ended problem set is:

New	5th	New	5th	New	5th
144	80	148	84	152	88
145	81	149	85	153	89
146	82	150	86		
147	83	151	87		


Concept-Study Guide Problems

4.1

The electric company charges the customers per kW-hour. What is that in SI units?

Solution:

The unit kW-hour is a rate multiplied with time. For the standard SI units the rate of energy is in W and the time is in seconds. The integration in Eq.4.21 becomes

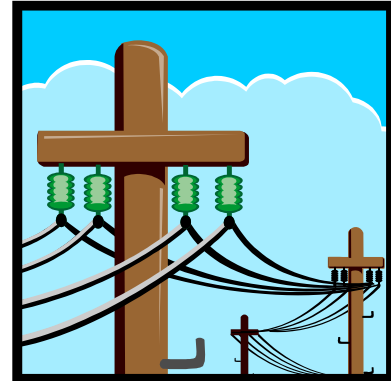


$$\begin{aligned} 1 \text{ kW-hour} &= 1000 \text{ W} \times 60 \frac{\text{min}}{\text{hour}} \text{ hour} \times 60 \frac{\text{s}}{\text{min}} = 3\,600\,000 \text{ Ws} \\ &= 3\,600\,000 \text{ J} = \mathbf{3.6 \text{ MJ}} \end{aligned}$$

4.2

A car engine is rated at 160 hp. What is the power in SI units?

Solution:

The horsepower is an older unit for power usually used for car engines. The conversion to standard SI units is given in Table A.1

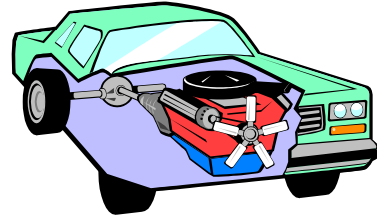

$$1 \text{ hp} = 0.7355 \text{ kW} = 735.5 \text{ W}$$

$$1 \text{ hp} = 0.7457 \text{ kW for the UK horsepower}$$

$$160 \text{ hp} = 160 \times 745.7 \text{ W} = 119\,312 \text{ W} = \mathbf{119.3 \text{ kW}}$$

4.3

A 1200 hp dragster engine has a drive shaft rotating at 2000 RPM. How much torque is on the shaft?

Power is force times rate of displacement as in Eq.4.2

Power, rate of work $\dot{W} = F \mathbf{V} = P \dot{V} = T \omega$

We need to convert the RPM to a value for angular velocity ω

$$\omega = \text{RPM} \times \frac{2\pi}{60 \text{ s}} = 2000 \times \frac{2\pi}{60 \text{ s}} = 209.44 \frac{\text{rad}}{\text{s}}$$

We need power in watts: $1 \text{ hp} = 0.7355 \text{ kW} = 735.5 \text{ W}$

$$T = \dot{W} / \omega = \frac{1200 \text{ hp} \times 735.5 \text{ W/hp}}{209.44 \text{ rad/s}} = 4214 \text{ W s} = \mathbf{4214 \text{ Nm}}$$

4.4

A 1200 hp dragster engine drives the car with a speed of 100 km/h. How much force is between the tires and the road?

Power is force times rate of displacement as in Eq.4.2

Power, rate of work $\dot{W} = F \mathbf{V} = P \dot{V} = T \omega$

We need the velocity in m/s: $\mathbf{V} = 100 \times 1000 / 3600 = 27.78 \text{ m/s}$

We need power in watts: $1 \text{ hp} = 0.7355 \text{ kW} = 735.5 \text{ W}$

$$F = \dot{W} / \mathbf{V} = \frac{1200 \times 735.5 \text{ W}}{27.78 \text{ m/s}} = 31\,771 \frac{\text{Nm/s}}{\text{m/s}}$$

$$= 31\,771 \text{ N} = \mathbf{31.8 \text{ kN}}$$


4.5

Two hydraulic piston/cylinders are connected through a hydraulic line so they have roughly the same pressure. If they have diameters of D_1 and $D_2 = 2D_1$ respectively, what can you say about the piston forces F_1 and F_2 ?

For each cylinder we have the total force as: $F = PA_{\text{cyl}} = P \pi D^2/4$

$$F_1 = PA_{\text{cyl}1} = P \pi D_1^2/4$$

$$F_2 = PA_{\text{cyl}2} = P \pi D_2^2/4 = P \pi 4 D_1^2/4 = 4 F_1$$



The forces are the total force acting up due to the cylinder pressure. There must be other forces on each piston to have a force balance so the pistons do not move.

4.6

Normally pistons have a flat head, but in diesel engines pistons can have bowls in them and protruding ridges. Does this geometry influence the work term?

The shape of the surface does not influence the displacement

$$dV = A_n dx$$

where A_n is the area projected to the plane normal to the direction of motion.


$$A_n = A_{cyl} = \pi D^2/4$$

Work is

$$dW = F dx = P dV = P A_n dx = P A_{cyl} dx$$

and thus unaffected by the surface shape.

Semi-spherical head is made to make room for larger valves.

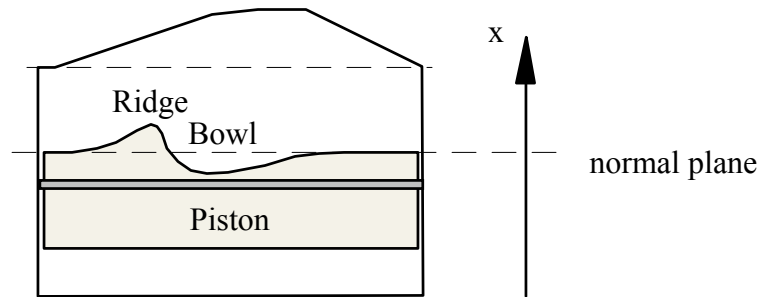

4.7

What is roughly the relative magnitude of the work in the process 1-2c versus the process 1-2a shown in figure 4.8?

By visual inspection the area below the curve 1-2c is roughly 50% of the rectangular area below the curve 1-2a. To see this better draw a straight line from state 1 to point f on the axis. This curve has exactly 50% of the area below it.

4.8

A hydraulic cylinder of area 0.01 m^2 must push a 1000 kg arm and shovel 0.5 m straight up. What pressure is needed and how much work is done?

$$\begin{aligned} F &= mg = 1000 \text{ kg} \times 9.81 \text{ m/s}^2 \\ &= 9810 \text{ N} = PA \end{aligned}$$

$$\begin{aligned} P &= F/A = 9810 \text{ N} / 0.01 \text{ m}^2 \\ &= 981\,000 \text{ Pa} = \mathbf{981 \text{ kPa}} \end{aligned}$$



$$W = \int F \, dx = F \Delta x = 9810 \text{ N} \times 0.5 \text{ m} = \mathbf{4905 \text{ J}}$$

4.9

A work of 2.5 kJ must be delivered on a rod from a pneumatic piston/cylinder where the air pressure is limited to 500 kPa. What diameter cylinder should I have to restrict the rod motion to maximum 0.5 m?

$$W = \int F dx = \int P dV = \int PA dx = PA \Delta x = P \frac{\pi}{4} D^2 \Delta x$$

$$D = \sqrt{\frac{4W}{\pi P \Delta x}} = \sqrt{\frac{4 \times 2.5 \text{ kJ}}{\pi \times 500 \text{ kPa} \times 0.5 \text{ m}}} = \mathbf{0.113 \text{ m}}$$

4.10

Helium gas expands from 125 kPa, 350 K and 0.25 m³ to 100 kPa in a polytropic process with $n = 1.667$. Is the work positive, negative or zero?

The boundary work is: $W = \int P dV$

P drops but does V go up or down?

The process equation is: $PV^n = C$


so we can solve for P to show it in a P-V diagram

$$P = CV^{-n}$$

as $n = 1.667$ the curve drops as V goes up we see

$$V_2 > V_1 \quad \text{giving} \quad dV > 0$$

and the work is then positive.




4.11

An ideal gas goes through an expansion process where the volume doubles. Which process will lead to the larger work output: an isothermal process or a polytropic process with $n = 1.25$?

The process equation is: $PV^n = C$

The polytropic process with $n = 1.25$ drops the pressure faster than the isothermal process with $n = 1$ and the area below the curve is then smaller.



4.12

Show how the polytropic exponent n can be evaluated if you know the end state properties, (P_1, V_1) and (P_2, V_2) .

Polytropic process: $PV^n = C$

Both states must be on the process line: $P_2V_2^n = C = P_1V_1^n$

Take the ratio to get: $\frac{P_1}{P_2} = \left(\frac{V_2}{V_1}\right)^n$

and then take \ln of the ratio

$$\ln\left(\frac{P_1}{P_2}\right) = \ln\left(\frac{V_2}{V_1}\right)^n = n \ln\left(\frac{V_2}{V_1}\right)$$

now solve for the exponent n

$$n = \ln\left(\frac{P_1}{P_2}\right) / \ln\left(\frac{V_2}{V_1}\right)$$

4.13

A drag force on an object moving through a medium (like a car through air or a submarine through water) is $F_d = 0.225 A \rho \mathbf{V}^2$. Verify the unit becomes Newton.

Solution:

$$F_d = 0.225 A \rho \mathbf{V}^2$$

$$\text{Units} = \text{m}^2 \times (\text{kg}/\text{m}^3) \times (\text{m}^2/\text{s}^2) = \text{kg m} / \text{s}^2 = \text{N}$$

4.14

A force of 1.2 kN moves a truck with 60 km/h up a hill. What is the power?

Solution:

$$\begin{aligned} \dot{W} &= F \mathbf{V} = 1.2 \text{ kN} \times 60 \text{ (km/h)} \\ &= 1.2 \times 10^3 \times 60 \times \frac{10^3}{3600} \frac{\text{Nm}}{\text{s}} \\ &= 20\,000 \text{ W} = \mathbf{20 \text{ kW}} \end{aligned}$$




4.15

Electric power is volts times ampere ($P = V i$). When a car battery at 12 V is charged with 6 amp for 3 hours how much energy is delivered?

Solution:

$$\begin{aligned} W &= \int \dot{W} dt = \dot{W} \Delta t = V i \Delta t \\ &= 12 \text{ V} \times 6 \text{ Amp} \times 3 \times 3600 \text{ s} \\ &= 777\,600 \text{ J} = \mathbf{777.6 \text{ kJ}} \end{aligned}$$



Remark: Volt times ampere is also watts, $1 \text{ W} = 1 \text{ V} \times 1 \text{ Amp}$.

4.16

Torque and energy and work have the same units (N m). Explain the difference.

Solution:

Work = force \times displacement, so units are N \times m. Energy in transfer

Energy is stored, could be from work input $1 \text{ J} = 1 \text{ N m}$

Torque = force \times arm static, no displacement needed

4.17

Find the rate of conduction heat transfer through a 1.5 cm thick hardwood board, $k = 0.16 \text{ W/m K}$, with a temperature difference between the two sides of 20°C .

One dimensional heat transfer by conduction, we do not know the area so we can find the flux (heat transfer per unit area W/m^2).

$$\dot{q} = \dot{Q}/A = k \frac{\Delta T}{\Delta x} = 0.16 \frac{\text{W}}{\text{m K}} \times \frac{20 \text{ K}}{0.015 \text{ m}} = \mathbf{213 \text{ W/m}^2}$$



4.18

A 2 m^2 window has a surface temperature of 15°C and the outside wind is blowing air at 2°C across it with a convection heat transfer coefficient of $h = 125 \text{ W/m}^2\text{K}$. What is the total heat transfer loss?

Solution:

$$\dot{Q} = h A \Delta T = 125 \text{ W/m}^2\text{K} \times 2 \text{ m}^2 \times (15 - 2) \text{ K} = \mathbf{3250 \text{ W}}$$

as a rate of heat transfer out.




4.19

A radiant heating lamp has a surface temperature of 1000 K with $\varepsilon = 0.8$. How large a surface area is needed to provide 250 W of radiation heat transfer?

Radiation heat transfer. We do not know the ambient so let us find the area for an emitted radiation of 250 W from the surface

$$\begin{aligned}\dot{Q} &= \varepsilon \sigma A T^4 \\ A &= \frac{\dot{Q}}{\varepsilon \sigma T^4} = \frac{250}{0.8 \times 5.67 \times 10^{-8} \times 1000^4} \\ &= \mathbf{0.0055 \text{ m}^2}\end{aligned}$$

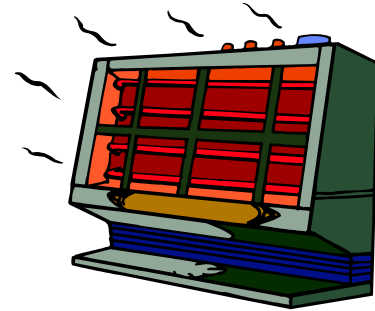

Force displacement work**4.20**

A piston of mass 2 kg is lowered 0.5 m in the standard gravitational field. Find the required force and work involved in the process.

Solution:

$$F = ma = 2 \text{ kg} \times 9.80665 \text{ m/s}^2 = \mathbf{19.61 \text{ N}}$$

$$W = \int F \, dx = F \int dx = F \Delta x = 19.61 \text{ N} \times 0.5 \text{ m} = \mathbf{9.805 \text{ J}}$$

4.21

An escalator raises a 100 kg bucket of sand 10 m in 1 minute. Determine the total amount of work done during the process.

Solution:

The work is a force with a displacement and force is constant: $F = mg$

$$W = \int F \, dx = F \int dx = F \Delta x = 100 \text{ kg} \times 9.80665 \text{ m/s}^2 \times 10 \text{ m} = \mathbf{9807 \text{ J}}$$


4.22

A bulldozer pushes 500 kg of dirt 100 m with a force of 1500 N. It then lifts the dirt 3 m up to put it in a dump truck. How much work did it do in each situation?

Solution:

$$\begin{aligned}W &= \int F \, dx = F \Delta x \\&= 1500 \, \text{N} \times 100 \, \text{m} \\&= 150\,000 \, \text{J} = \mathbf{150 \, \text{kJ}}\end{aligned}$$

$$\begin{aligned}W &= \int F \, dz = \int mg \, dz = mg \Delta Z \\&= 500 \, \text{kg} \times 9.807 \, \text{m/s}^2 \times 3 \, \text{m} \\&= 14\,710 \, \text{J} = \mathbf{14.7 \, \text{kJ}}\end{aligned}$$

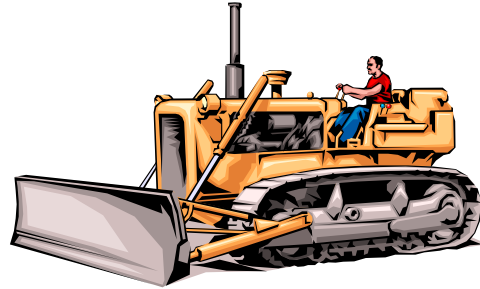

4.23

A hydraulic cylinder has a piston of cross sectional area 25 cm^2 and a fluid pressure of 2 MPa . If the piston is moved 0.25 m how much work is done?

Solution:

The work is a force with a displacement and force is constant: $F = PA$

$$\begin{aligned} W &= \int F \, dx = \int PA \, dx = PA \, \Delta x \\ &= 2000 \text{ kPa} \times 25 \times 10^{-4} \text{ m}^2 \times 0.25 \text{ m} = \mathbf{1.25 \text{ kJ}} \end{aligned}$$

Units: $\text{kPa m}^2 \text{ m} = \text{kN m}^{-2} \text{ m}^2 \text{ m} = \text{kN m} = \text{kJ}$

4.24

Two hydraulic cylinders maintain a pressure of 1200 kPa. One has a cross sectional area of 0.01 m^2 the other 0.03 m^2 . To deliver a work of 1 kJ to the piston how large a displacement (V) and piston motion H is needed for each cylinder? Neglect P_{atm} .

Solution:


$$W = \int F dx = \int P dV = \int PA dx = PA * H = P\Delta V$$

$$\Delta V = \frac{W}{P} = \frac{1 \text{ kJ}}{1200 \text{ kPa}} = \mathbf{0.000833 \text{ m}^3}$$

Both cases the height is $H = \Delta V/A$

$$H_1 = \frac{0.000833}{0.01} = \mathbf{0.0833 \text{ m}}$$

$$H_2 = \frac{0.000833}{0.03} = \mathbf{0.0278 \text{ m}}$$



4.25

A linear spring, $F = k_s(x - x_0)$, with spring constant $k_s = 500 \text{ N/m}$, is stretched until it is 100 mm longer. Find the required force and work input.

Solution:

$$F = k_s(x - x_0) = 500 \times 0.1 = \mathbf{50 \text{ N}}$$

$$\begin{aligned} W &= \int F \, dx = \int k_s(x - x_0) \, d(x - x_0) = k_s(x - x_0)^2/2 \\ &= 500 \frac{\text{N}}{\text{m}} \times (0.1^2/2) \text{ m}^2 = \mathbf{2.5 \text{ J}} \end{aligned}$$

4.26

A nonlinear spring has the force versus displacement relation of $F = k_{ns}(x - x_0)^n$. If the spring end is moved to x_1 from the relaxed state, determine the formula for the required work.

Solution:

In this case we know F as a function of x and can integrate

$$W = \int F dx = \int k_{ns}(x - x_0)^n d(x - x_0) = \frac{k_{ns}}{n + 1} (x_1 - x_0)^{n+1}$$

4.27

The rolling resistance of a car depends on its weight as: $F = 0.006 mg$. How long will a car of 1400 kg drive for a work input of 25 kJ?

Solution:

Work is force times distance so assuming a constant force we get

$$W = \int F dx = F x = 0.006 mgx$$

Solve for x

$$x = \frac{W}{0.006 mg} = \frac{25 \text{ kJ}}{0.006 \times 1400 \text{ kg} \times 9.807 \text{ m/s}^2} = \mathbf{303.5 \text{ m}}$$

4.28

A car drives for half an hour at constant speed and uses 30 MJ over a distance of 40 km. What was the traction force to the road and its speed?

Solution:

We need to relate the work to the force and distance

$$W = \int F dx = F x$$

$$F = \frac{W}{x} = \frac{30\,000\,000\text{ J}}{40\,000\text{ m}} = \mathbf{750\text{ N}}$$

$$V = \frac{L}{t} = \frac{40\text{ km}}{0.5\text{ h}} = 80 \frac{\text{km}}{\text{h}} = 80 \frac{1000\text{ m}}{3600\text{ s}} = \mathbf{22.2\text{ ms}^{-1}}$$

4.29

The air drag force on a car is $0.225 A \rho V^2$. Assume air at 290 K, 100 kPa and a car frontal area of 4 m^2 driving at 90 km/h. How much energy is used to overcome the air drag driving for 30 minutes?

$$\rho = \frac{1}{v} = \frac{P}{RT} = \frac{100}{0.287 \times 290} = 1.2015 \frac{\text{kg}}{\text{m}^3}$$

$$V = 90 \frac{\text{km}}{\text{h}} = 90 \times \frac{1000 \text{ m}}{3600 \text{ s}} = 25 \text{ m/s}$$

$$\Delta x = V \Delta t = 25 \times 30 \times 60 = 45\,000 \text{ m}$$

$$\begin{aligned} F &= 0.225 A \rho V^2 = 0.225 \times 4 \times 1.2015 \times 25^2 \\ &= 675.8 \text{ m}^2 \frac{\text{kg}}{\text{m}^3} \times \frac{\text{m}^2}{\text{s}^2} = \mathbf{676 \text{ N}} \end{aligned}$$

$$W = F \Delta x = 676 \text{ N} \times 45\,000 \text{ m} = 30\,420\,000 \text{ J} = \mathbf{30.42 \text{ MJ}}$$

4.30

Two hydraulic piston/cylinders are connected with a line. The master cylinder has an area of 5 cm^2 creating a pressure of 1000 kPa . The slave cylinder has an area of 3 cm^2 . If 25 J is the work input to the master cylinder what is the force and displacement of each piston and the work output of the slave cylinder piston?

Solution:

$$W = \int F_x dx = \int P dv = \int P A dx = P A \Delta x$$

$$\Delta x_{\text{master}} = \frac{W}{PA} = \frac{25}{1000 \times 5 \times 10^{-4}} = 0.05 \text{ m}$$


$$A \Delta x = \Delta V = 5 \times 10^{-4} \times 0.05 = 2.5 \times 10^{-5} \text{ m}^3 = \Delta V_{\text{slave}} = A \Delta x \rightarrow$$

$$\Delta x_{\text{slave}} = \Delta V / A = 2.5 \times 10^{-5} / 3 \times 10^{-4} = 0.08333 \text{ m}$$

$$F_{\text{master}} = P A = 1000 \times 5 \times 10^{-4} \times 10^3 = \mathbf{500 \text{ N}}$$

$$F_{\text{slave}} = P A = 1000 \times 10^3 \times 3 \times 10^{-4} = \mathbf{300 \text{ N}}$$

$$W_{\text{slave}} = F \Delta x = 300 \times 0.08333 = \mathbf{25 \text{ J}}$$

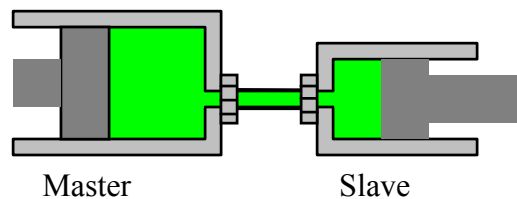

Boundary work simple 1 step process

4.31

A constant pressure piston cylinder contains 0.2 kg water as saturated vapor at 400 kPa. It is now cooled so the water occupies half the original volume. Find the work in the process.



Solution:

$$\text{Table B.1.2} \quad v_1 = 0.4625 \text{ m}^3/\text{kg} \quad V_1 = mv_1 = 0.0925 \text{ m}^3$$

$$v_2 = v_1 / 2 = 0.23125 \text{ m}^3/\text{kg} \quad V_2 = V_1 / 2 = 0.04625 \text{ m}^3$$

Process: $P = C$ so the work term integral is

$$W = \int P dV = P(V_2 - V_1) = 400 \text{ kPa} \times (0.04625 - 0.0925) \text{ m}^3 = \mathbf{-18.5 \text{ kJ}}$$

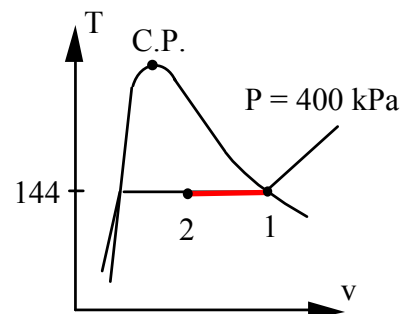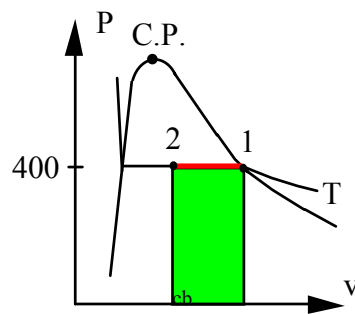

4.32

A steam radiator in a room at 25°C has saturated water vapor at 110 kPa flowing through it, when the inlet and exit valves are closed. What is the pressure and the quality of the water, when it has cooled to 25°C? How much work is done?

Solution: Control volume radiator.

After the valve is closed no more flow, constant volume and mass.

$$1: x_1 = 1, P_1 = 110 \text{ kPa} \Rightarrow v_1 = v_g = 1.566 \text{ m}^3/\text{kg} \text{ from Table B.1.2}$$


$$2: T_2 = 25^\circ\text{C}, \quad ?$$

$$\text{Process:} \quad v_2 = v_1 = 1.566 \text{ m}^3/\text{kg} = [0.001003 + x_2 \times 43.359] \text{ m}^3/\text{kg}$$

$$x_2 = \frac{1.566 - 0.001003}{43.359} = \mathbf{0.0361}$$

$$\text{State 2 : } T_2, x_2 \quad \text{From Table B.1.1} \quad \mathbf{P_2 = P_{sat} = 3.169 \text{ kPa}}$$

$${}_1W_2 = \int PdV = 0$$



4.33

A 400-L tank A, see figure P4.33, contains argon gas at 250 kPa, 30°C. Cylinder B, having a frictionless piston of such mass that a pressure of 150 kPa will float it, is initially empty. The valve is opened and argon flows into B and eventually reaches a uniform state of 150 kPa, 30°C throughout. What is the work done by the argon?

Solution:

Take C.V. as all the argon in both A and B. Boundary movement work done in cylinder B against constant external pressure of 150 kPa. Argon is an ideal gas, so write out that the mass and temperature at state 1 and 2 are the same

$$P_{A1}V_A = m_A RT_{A1} = m_A RT_2 = P_2(V_A + V_{B2})$$

$$\Rightarrow V_{B2} = \frac{250 \times 0.4}{150} - 0.4 = 0.2667 \text{ m}^3$$

$${}_1W_2 = \int_1^2 P_{\text{ext}} dV = P_{\text{ext}}(V_{B2} - V_{B1}) = 150 \text{ kPa} (0.2667 - 0) \text{ m}^3 = \mathbf{40 \text{ kJ}}$$

4.34

A piston cylinder contains air at 600 kPa, 290 K and a volume of 0.01 m³. A constant pressure process gives 54 kJ of work out. Find the final volume and temperature of the air.

Solution:

$$W = \int P \, dV = P\Delta V$$

$$\Delta V = W/P = \frac{54}{600} = 0.09 \text{ m}^3$$

$$V_2 = V_1 + \Delta V = 0.01 + 0.09 = 0.1 \text{ m}^3$$

Assuming ideal gas, $PV = mRT$, then we have

$$T_2 = \frac{P_2 V_2}{mR} = \frac{P_2 V_2}{P_1 V_1} T_1 = \frac{V_2}{V_1} T_1 = \frac{0.1}{0.01} 290 = \mathbf{2900 \text{ K}}$$

4.35

Saturated water vapor at 200 kPa is in a constant pressure piston cylinder. At this state the piston is 0.1 m from the cylinder bottom and cylinder area is 0.25 m². The temperature is then changed to 200°C. Find the work in the process.

Solution:

$$\text{State 1 from B.1.2 (P, x): } v_1 = v_g = 0.8857 \text{ m}^3/\text{kg} \quad (\text{also in B.1.3})$$

$$\text{State 2 from B.1.3 (P, T): } v_2 = 1.0803 \text{ m}^3/\text{kg}$$



Since the mass and the cross sectional area is the same we get

$$h_2 = \frac{v_2}{v_1} \times h_1 = \frac{1.0803}{0.8857} \times 0.1 = 0.122 \text{ m}$$

Process: $P = C$ so the work integral is

$$W = \int P dV = P(V_2 - V_1) = PA (h_2 - h_1)$$

$$W = 200 \text{ kPa} \times 0.25 \text{ m}^2 \times (0.122 - 0.1) \text{ m} = \mathbf{1.1 \text{ kJ}}$$

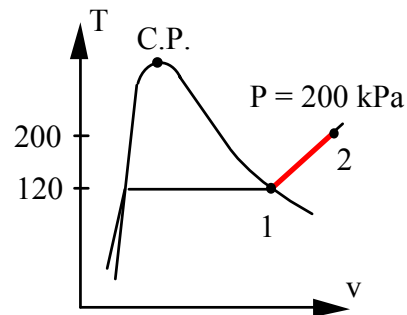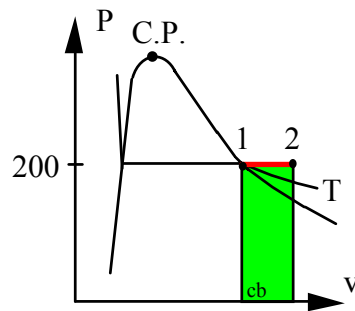

4.36

A cylinder fitted with a frictionless piston contains 5 kg of superheated refrigerant R-134a vapor at 1000 kPa, 140°C. The setup is cooled at constant pressure until the R-134a reaches a quality of 25%. Calculate the work done in the process.

Solution:


Constant pressure process boundary work. State properties from Table B.5.2

State 1: $v = 0.03150 \text{ m}^3/\text{kg}$,

State 2: $v = 0.000871 + 0.25 \times 0.01956 = 0.00576 \text{ m}^3/\text{kg}$

Interpolated to be at 1000 kPa, numbers at 1017 kPa could have been used in which case: $v = 0.00566 \text{ m}^3/\text{kg}$

$$\begin{aligned} {}_1W_2 &= \int P \, dV = P (V_2 - V_1) = mP (v_2 - v_1) \\ &= 5 \times 1000 (0.00576 - 0.03150) = \mathbf{-128.7 \text{ kJ}} \end{aligned}$$

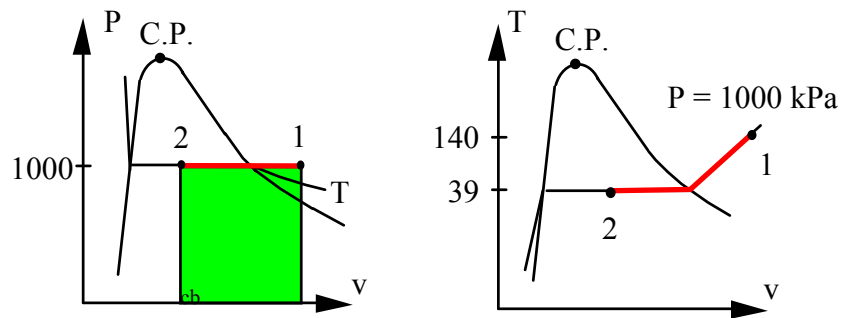

4.37

Find the specific work in Problem 3.54 for the case the volume is reduced.



Saturated vapor R-134a at 50°C changes volume at constant temperature. Find the new pressure, and quality if saturated, if the volume doubles. Repeat the question for the case the volume is reduced to half the original volume.

Solution:

R-134a 50°C

Table B.4.1: $v_1 = v_g = 0.01512 \text{ m}^3/\text{kg}$, $v_2 = v_1 / 2 = 0.00756 \text{ m}^3/\text{kg}$

$${}_1W_2 = \int P dV = 1318.1 \text{ kPa} (0.00756 - 0.01512) \text{ m}^3/\text{kg} = \mathbf{-9.96 \text{ kJ/kg}}$$

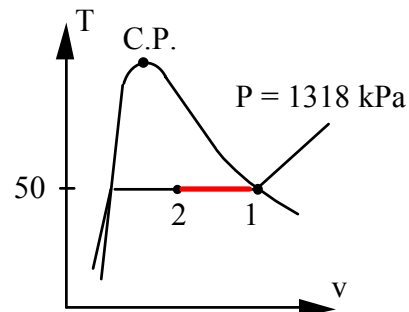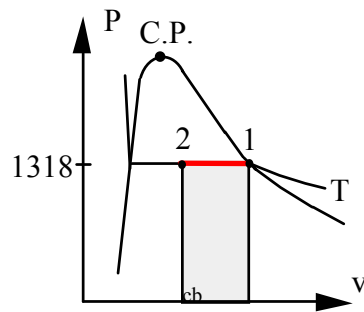


4.38

A piston/cylinder has 5 m of liquid 20°C water on top of the piston ($m = 0$) with cross-sectional area of 0.1 m^2 , see Fig. P2.57. Air is let in under the piston that rises and pushes the water out over the top edge. Find the necessary work to push all the water out and plot the process in a P-V diagram.

Solution:

$$\begin{aligned}
 P_1 &= P_o + \rho g H \\
 &= 101.32 + 997 \times 9.807 \times 5 / 1000 = 150.2 \text{ kPa} \\
 \Delta V &= H \times A = 5 \times 0.1 = 0.5 \text{ m}^3 \\
 {}_1W_2 &= \text{AREA} = \int P \, dV = \frac{1}{2} (P_1 + P_o) (V_{\max} - V_1) \\
 &= \frac{1}{2} (150.2 + 101.32) \text{ kPa} \times 0.5 \text{ m}^3 \\
 &= \mathbf{62.88 \text{ kJ}}
 \end{aligned}$$

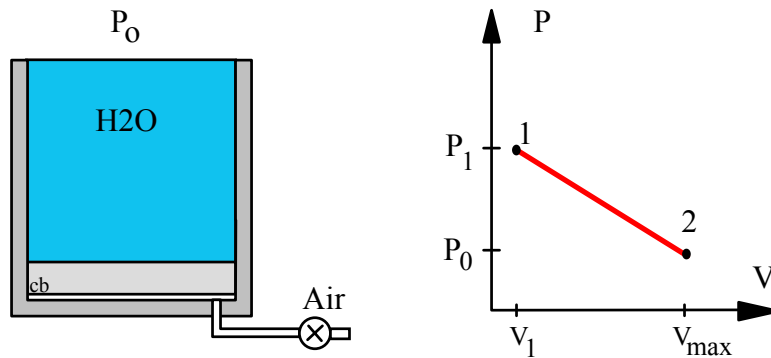

4.39

Air in a spring loaded piston/cylinder has a pressure that is linear with volume, $P = A + BV$. With an initial state of $P = 150$ kPa, $V = 1$ L and a final state of 800 kPa and volume 1.5 L it is similar to the setup in Problem 3.113. Find the work done by the air.

Solution:

Knowing the process equation: $P = A + BV$ giving a linear variation of pressure versus volume the straight line in the P-V diagram is fixed by the two points as state 1 and state 2. The work as the integral of PdV equals the area under the process curve in the P-V diagram.


$$\text{State 1: } P_1 = 150 \text{ kPa} \quad V_1 = 1 \text{ L} = 0.001 \text{ m}^3$$

$$\text{State 2: } P_2 = 800 \text{ kPa} \quad V_2 = 1.5 \text{ L} = 0.0015 \text{ m}^3$$

$$\text{Process: } P = A + BV \quad \text{linear in } V$$

$$\Rightarrow {}_1W_2 = \int_1^2 PdV = \left(\frac{P_1 + P_2}{2} \right) (V_2 - V_1)$$

$$= \frac{1}{2} (150 + 800) \text{ kPa} (1.5 - 1) \times 0.001 \text{ m}^3 = \mathbf{0.2375 \text{ kJ}}$$



4.40

Find the specific work in Problem 3.43.

Saturated water vapor at 200 kPa is in a constant pressure piston cylinder. At this state the piston is 0.1 m from the cylinder bottom. How much is this distance if the temperature is changed to a) 200 °C and b) 100 °C.

Solution:

$$\text{Process: } P = C \Rightarrow w = \int P dv = P_1(v - v_1)$$

$$\text{State 1: (200 kPa, } x = 1) \text{ in B.1.2: } v_1 = v_g(200 \text{ kPa}) = 0.8857 \text{ m}^3/\text{kg}$$

CASE a)


$$\text{State a: (200 kPa, } 200^\circ\text{C}) \text{ B.1.3: } v_a = 1.083 \text{ m}^3/\text{kg}$$

$${}_1w_a = \int P dv = 200(1.083 - 0.8857) = 38.92 \text{ kJ/kg}$$

CASE b)

$$\text{State b: (200 kPa, } 100^\circ\text{C}) \text{ B.1.1: } v_b \approx v_f = 0.001044 \text{ m}^3/\text{kg}$$

$${}_1W_b = \int P dV = 200(0.001044 - 0.8857) = -176.9 \text{ kJ/kg}$$

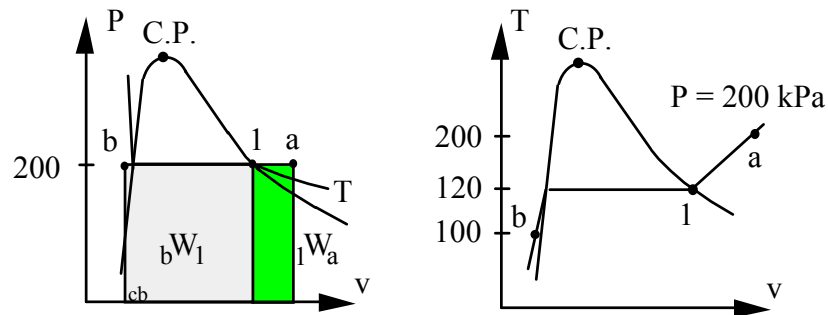

4.41

A piston/cylinder contains 1 kg water at 20°C with volume 0.1 m³. By mistake someone locks the piston preventing it from moving while we heat the water to saturated vapor. Find the final temperature, volume and the process work.

Solution

$$1: v_1 = V/m = 0.1 \text{ m}^3/1 \text{ kg} = 0.1 \text{ m}^3/\text{kg}$$

$$2: \text{Constant volume: } v_2 = v_g = v_1$$

$$V_2 = V_1 = \mathbf{0.1 \text{ m}^3}$$

$${}_1W_2 = \int P \, dV = \mathbf{0}$$

$$T_2 = T_{\text{sat}} = 210 + 5 \frac{0.1 - 0.10324}{0.09361 - 0.10324} = \mathbf{211.7^\circ\text{C}}$$

4.42

A piston cylinder contains 1 kg of liquid water at 20°C and 300 kPa. There is a linear spring mounted on the piston such that when the water is heated the pressure reaches 3 MPa with a volume of 0.1 m³.

- Find the final temperature
- Plot the process in a P-v diagram.
- Find the work in the process.

Solution:

Take CV as the water. This is a constant mass:

$$m_2 = m_1 = m ;$$

State 1: Compressed liquid, take saturated liquid at same temperature.

$$\text{B.1.1: } v_1 = v_f(20) = 0.001002 \text{ m}^3/\text{kg},$$




State 2: $v_2 = V_2/m = 0.1/1 = 0.1 \text{ m}^3/\text{kg}$ and $P = 3000 \text{ kPa}$ from B.1.3

=> Superheated vapor close to $T = 400^\circ\text{C}$

Interpolate: $T_2 = 404^\circ\text{C}$

Work is done while piston moves at linearly varying pressure, so we get:

$$\begin{aligned} {}_1W_2 &= \int P \, dV = \text{area} = P_{\text{avg}} (V_2 - V_1) = \frac{1}{2} (P_1 + P_2)(V_2 - V_1) \\ &= 0.5 (300 + 3000)(0.1 - 0.001) = \mathbf{163.35 \text{ kJ}} \end{aligned}$$

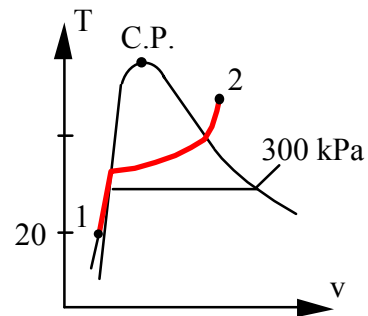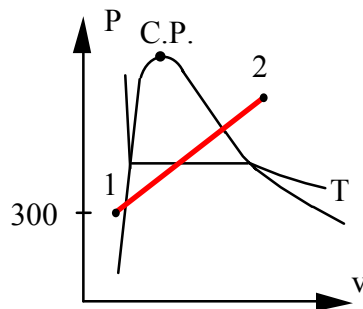

4.43

A piston cylinder contains 3 kg of air at 20°C and 300 kPa. It is now heated up in a constant pressure process to 600 K.

- Find the final volume
- Plot the process path in a P-v diagram
- Find the work in the process.

Solution:

Ideal gas $PV = mRT$


State 1: T_1, P_1 ideal gas so $P_1V_1 = mRT_1$

$$V_1 = mR T_1 / P_1 = 3 \times 0.287 \times 293.15 / 300 = 0.8413 \text{ m}^3$$

State 2: $T_2, P_2 = P_1$ and ideal gas so $P_2V_2 = mRT_2$

$$V_2 = mR T_2 / P_2 = 3 \times 0.287 \times 600 / 300 = \mathbf{1.722 \text{ m}^3}$$

$${}_1W_2 = \int P dV = P (V_2 - V_1) = 300 (1.722 - 0.8413) = \mathbf{264.2 \text{ kJ}}$$

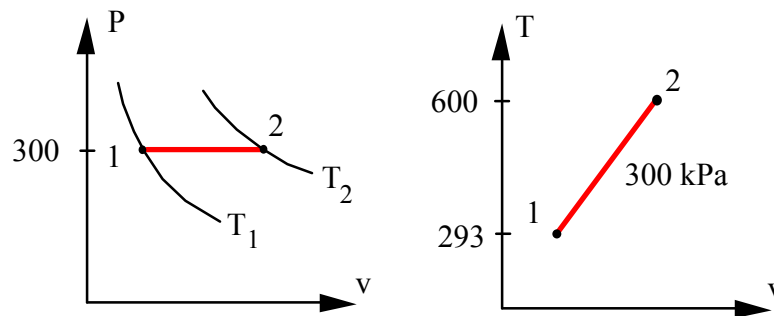

4.44

A piston cylinder contains 0.5 kg air at 500 kPa, 500 K. The air expands in a process so P is linearly decreasing with volume to a final state of 100 kPa, 300 K. Find the work in the process.

Solution:


Process: $P = A + BV$ (linear in V , decreasing means B is negative)

From the process: ${}_1W_2 = \int PdV = \text{AREA} = \frac{1}{2}(P_1 + P_2)(V_2 - V_1)$

$$V_1 = mR T_1 / P_1 = 0.5 \times 0.287 \times (500/500) = 0.1435 \text{ m}^3$$

$$V_2 = mR T_2 / P_2 = 0.5 \times 0.287 \times (300/100) = 0.4305 \text{ m}^3$$

$${}_1W_2 = \frac{1}{2} \times (500 + 100) \text{ kPa} \times (0.4305 - 0.1435) \text{ m}^3 = \mathbf{86.1 \text{ kJ}}$$

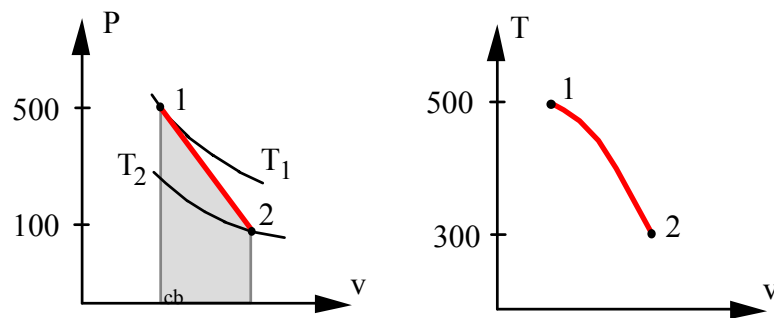

4.45

Consider the nonequilibrium process described in Problem 3.109. Determine the work done by the carbon dioxide in the cylinder during the process.

A cylinder has a thick piston initially held by a pin as shown in Fig. P3.109. The cylinder contains carbon dioxide at 200 kPa and ambient temperature of 290 K. The metal piston has a density of 8000 kg/m³ and the atmospheric pressure is 101 kPa. The pin is now removed, allowing the piston to move and after a while the gas returns to ambient temperature. Is the piston against the stops?

Solution:

Knowing the process (P vs. V) and the states 1 and 2 we can find W.

If piston floats or moves:

$$P = P_{\text{lift}} = P_o + \rho Hg = 101.3 + 8000 \times 0.1 \times 9.807 / 1000 = 108.8 \text{ kPa}$$

Assume the piston is at the stops (since $P_1 > P_{\text{lift}}$ piston would move)

$$V_2 = V_1 \times 150 / 100 = (\pi/4) 0.1^2 \times 0.1 \times 1.5 = 0.000785 \times 1.5 = 0.0011775 \text{ m}^3$$

For max volume we must have $P > P_{\text{lift}}$ so check using ideal gas and constant T process: $P_2 = P_1 V_1 / V_2 = 200/1.5 = 133 \text{ kPa} > P_{\text{lift}}$ and piston is at stops.

$$\begin{aligned} {}_1W_2 &= \int P_{\text{lift}} dV = P_{\text{lift}} (V_2 - V_1) = 108.8 (0.0011775 - 0.000785) \\ &= \mathbf{0.0427 \text{ kJ}} \end{aligned}$$

Remark: The work is determined by the equilibrium pressure, P_{lift} , and not the instantaneous pressure that will accelerate the piston (give it kinetic energy). We need to consider the quasi-equilibrium process to get W.

4.46

Consider the problem of inflating the helium balloon, as described in problem 3.79. For a control volume that consists of the helium inside the balloon determine the work done during the filling process when the diameter changes from 1 m to 4 m.

Solution :

Inflation at constant $P = P_0 = 100 \text{ kPa}$ to $D_1 = 1 \text{ m}$, then

$$P = P_0 + C (D^{*-1} - D^{*-2}), \quad D^* = D / D_1,$$

to $D_2 = 4 \text{ m}$, $P_2 = 400 \text{ kPa}$, from which we find the constant C as:

$$400 = 100 + C[(1/4) - (1/4)^2] \Rightarrow C = 1600 \text{ kPa}$$

The volumes are: $V = \frac{\pi}{6} D^3 \Rightarrow V_1 = 0.5236 \text{ m}^3; V_2 = 33.51 \text{ m}^3$

$$\begin{aligned} W_{CV} &= \int_1^2 P dV \\ &= P_0(V_2 - V_1) + \int_1^2 C(D^{*-1} - D^{*-2}) dV \end{aligned}$$

$$V = \frac{\pi}{6} D^3, \quad dV = \frac{\pi}{2} D^2 dD = \frac{\pi}{2} D_1^3 D^{*2} dD^*$$

$$\Rightarrow W_{CV} = P_0(V_2 - V_1) + 3CV_1 \int_{D_1^*=1}^{D_2^*=4} (D^*-1) dD^*$$

$$= P_0(V_2 - V_1) + 3CV_1 \left[\frac{D_2^{*2} - D_1^{*2}}{2} - (D_2^* - D_1^*) \right]_1^4$$

$$= 100 \times (33.51 - 0.5236) + 3 \times 1600 \times 0.5236 \left[\frac{16-1}{2} - (4-1) \right]$$

$$= \mathbf{14\ 608 \text{ kJ}}$$


Polytropic process

4.47

Consider a mass going through a polytropic process where pressure is directly proportional to volume ($n = -1$). The process starts with $P = 0$, $V = 0$ and ends with $P = 600$ kPa, $V = 0.01$ m³. The physical setup could be as in Problem 2.22. Find the boundary work done by the mass.

Solution:

The setup has a pressure that varies linearly with volume going through the initial and the final state points. The work is the area below the process curve.

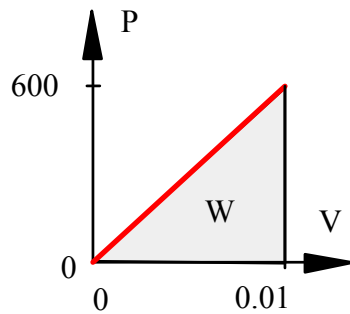

$$\begin{aligned}
 W &= \int P dV = \text{AREA} \\
 &= \frac{1}{2} (P_1 + P_2)(V_2 - V_1) \\
 &= \frac{1}{2} (P_2 + 0)(V_2 - 0) \\
 &= \frac{1}{2} P_2 V_2 = \frac{1}{2} \times 600 \times 0.01 = \mathbf{3 \text{ kJ}}
 \end{aligned}$$

4.48

The piston/cylinder shown in Fig. P4.48 contains carbon dioxide at 300 kPa, 100°C with a volume of 0.2 m³. Mass is added at such a rate that the gas compresses according to the relation $PV^{1.2} = \text{constant}$ to a final temperature of 200°C. Determine the work done during the process.

Solution:

From Eq. 4.4 for the polytropic process $PV^n = \text{const}$ ($n \neq 1$)

$${}_1W_2 = \int_1^2 PdV = \frac{P_2V_2 - P_1V_1}{1 - n}$$

Assuming ideal gas, $PV = mRT$

$${}_1W_2 = \frac{mR(T_2 - T_1)}{1 - n},$$

$$\text{But } mR = \frac{P_1V_1}{T_1} = \frac{300 \times 0.2}{373.15} \frac{\text{kPa m}^3}{\text{K}} = 0.1608 \text{ kJ/K}$$

$${}_1W_2 = \frac{0.1608(473.2 - 373.2) \text{ kJ K}}{1 - 1.2} = \mathbf{-80.4 \text{ kJ}}$$

4.49

A gas initially at 1 MPa, 500°C is contained in a piston and cylinder arrangement with an initial volume of 0.1 m³. The gas is then slowly expanded according to the relation $PV = \text{constant}$ until a final pressure of 100 kPa is reached. Determine the work for this process.

Solution:


By knowing the process and the states 1 and 2 we can find the relation between the pressure and the volume so the work integral can be performed.

$$\text{Process: } PV = C \Rightarrow V_2 = P_1 V_1 / P_2 = 1000 \times 0.1 / 100 = 1 \text{ m}^3$$

For this process work is integrated to Eq.4.5

$${}_1W_2 = \int P \, dV = \int C V^{-1} dV = C \ln(V_2/V_1)$$

$$\begin{aligned} {}_1W_2 &= P_1 V_1 \ln \frac{V_2}{V_1} = 1000 \times 0.1 \ln (1/0.1) \\ &= \mathbf{230.3 \text{ kJ}} \end{aligned}$$



4.50

Helium gas expands from 125 kPa, 350 K and 0.25 m³ to 100 kPa in a polytropic process with $n = 1.667$. How much work does it give out?

Solution:

$$\text{Process equation: } PV^n = \text{constant} = P_1 V_1^n = P_2 V_2^n$$

Solve for the volume at state 2

$$V_2 = V_1 (P_1/P_2)^{1/n} = 0.25 \times \left(\frac{125}{100}\right)^{0.6} = 0.2852 \text{ m}^3$$

Work from Eq.4.4

$${}_1W_2 = \frac{P_2 V_2 - P_1 V_1}{1-n} = \frac{100 \times 0.2852 - 125 \times 0.25}{1 - 1.667} \text{ kPa m}^3 = \mathbf{4.09 \text{ kJ}}$$

4.51

Air goes through a polytropic process from 125 kPa, 325 K to 300 kPa and 500 K. Find the polytropic exponent n and the specific work in the process.

Solution:

$$\text{Process: } Pv^n = \text{Const} = P_1 v_1^n = P_2 v_2^n$$

$$\text{Ideal gas } Pv = RT \quad \text{so}$$

$$v_1 = \frac{RT}{P} = \frac{0.287 \times 325}{125} = 0.7462 \text{ m}^3/\text{kg}$$

$$v_2 = \frac{RT}{P} = \frac{0.287 \times 500}{300} = 0.47833 \text{ m}^3/\text{kg}$$

From the process equation

$$(P_2/P_1) = (v_1/v_2)^n \quad \Rightarrow \quad \ln(P_2/P_1) = n \ln(v_1/v_2)$$

$$n = \ln(P_2/P_1) / \ln(v_1/v_2) = \frac{\ln 2.4}{\ln 1.56} = \mathbf{1.969}$$

The work is now from Eq.4.4 per unit mass

$${}_1w_2 = \frac{P_2 v_2 - P_1 v_1}{1-n} = \frac{R(T_2 - T_1)}{1-n} = \frac{0.287(500 - 325)}{1-1.969} = \mathbf{-51.8 \text{ kJ/kg}}$$

4.52

A piston cylinder contains 0.1 kg air at 100 kPa, 400 K which goes through a polytropic compression process with $n = 1.3$ to a pressure of 300 kPa. How much work has the air done in the process?

Solution:

Process: $Pv^n = \text{Const.}$


$$T_2 = T_1 (P_2 V_2 / P_1 V_1) = T_1 (P_2 / P_1)(P_1 / P_2)^{1/n}$$

$$= 400 \times (300/100)^{(1 - 1/1.3)} = 515.4 \text{ K}$$

Work term is already integrated giving Eq.4.4

$${}_1W_2 = \frac{1}{1-n} (P_2 V_2 - P_1 V_1) = \frac{mR}{1-n} (T_2 - T_1) \quad \text{Since Ideal gas,}$$

$$= \frac{0.2 \times 0.287}{1 - 1.3} \times (515.4 - 400) = -477 \text{ kJ}$$



4.53


A balloon behaves so the pressure is $P = C_2 V^{1/3}$, $C_2 = 100 \text{ kPa/m}$. The balloon is blown up with air from a starting volume of 1 m^3 to a volume of 3 m^3 . Find the final mass of air assuming it is at 25°C and the work done by the air.

Solution:

The process is polytropic with exponent $n = -1/3$.

$$P_1 = C_2 V^{1/3} = 100 \times 1^{1/3} = 100 \text{ kPa}$$

$$P_2 = C_2 V^{1/3} = 100 \times 3^{1/3} = 144.22 \text{ kPa}$$



$${}_1W_2 = \int P \, dV = \frac{P_2 V_2 - P_1 V_1}{1 - n} \quad (\text{Equation 4.4})$$

$$= \frac{144.22 \times 3 - 100 \times 1}{1 - (-1/3)} = \mathbf{249.5 \text{ kJ}}$$

$$m_2 = \frac{P_2 V_2}{RT_2} = \frac{144.22 \times 3}{0.287 \times 298} = \mathbf{5.056 \text{ kg}}$$

4.54

A balloon behaves such that the pressure inside is proportional to the diameter squared. It contains 2 kg of ammonia at 0°C, 60% quality. The balloon and ammonia are now heated so that a final pressure of 600 kPa is reached. Considering the ammonia as a control mass, find the amount of work done in the process.

Solution:

Process : $P \propto D^2$, with $V \propto D^3$ this implies $P \propto D^2 \propto V^{2/3}$ so


$PV^{-2/3} = \text{constant}$, which is a polytropic process, $n = -2/3$

From table B.2.1: $V_1 = mv_1 = 2(0.001566 + 0.6 \times 0.28783) = 0.3485 \text{ m}^3$

$$V_2 = V_1 \left(\frac{P_2}{P_1} \right)^{3/2} = 0.3485 \left(\frac{600}{429.3} \right)^{3/2} = 0.5758 \text{ m}^3$$

$${}_1W_2 = \int P dV = \frac{P_2 V_2 - P_1 V_1}{1 - n} \quad (\text{Equation 4.4})$$

$$= \frac{600 \times 0.5758 - 429.3 \times 0.3485}{1 - (-2/3)} = \mathbf{117.5 \text{ kJ}}$$



4.55

Consider a piston cylinder with 0.5 kg of R-134a as saturated vapor at -10°C . It is now compressed to a pressure of 500 kPa in a polytropic process with $n = 1.5$. Find the final volume and temperature, and determine the work done during the process.

Solution:

Take CV as the R-134a which is a control mass. $m_2 = m_1 = m$

Process: $Pv^{1.5} = \text{constant}$ until $P = 500 \text{ kPa}$

1: (T, x) $v_1 = 0.09921 \text{ m}^3/\text{kg}$, $P = P_{\text{sat}} = 201.7 \text{ kPa}$ from Table B.5.1

2: (P, process) $v_2 = v_1 (P_1/P_2)^{(1/1.5)} = 0.09921 \times (201.7/500)^{2/3} = \mathbf{0.05416}$

Given (P, v) at state 2 from B.5.2 it is superheated vapor at $T_2 = \mathbf{79^{\circ}\text{C}}$

Process gives $P = C v^{-1.5}$, which is integrated for the work term, Eq.(4.4)

$$\begin{aligned} {}_1W_2 &= \int P \, dV = \frac{m}{1 - 1.5} (P_2 v_2 - P_1 v_1) \\ &= \frac{2}{-0.5} \times (500 \times 0.05416 - 201.7 \times 0.09921) = \mathbf{-7.07 \text{ kJ}} \end{aligned}$$

4.56

Consider the process described in Problem 3.98. With 1 kg water as a control mass, determine the boundary work during the process.

A spring-loaded piston/cylinder contains water at 500°C, 3 MPa. The setup is such that pressure is proportional to volume, $P = CV$. It is now cooled until the water becomes saturated vapor. Sketch the P - v diagram and find the final pressure.


Solution :

$$\text{State 1: Table B.1.3: } v_1 = 0.11619 \text{ m}^3/\text{kg}$$

$$\text{Process: } m \text{ is constant and } P = C_0V = C_0m v = C v$$

$$P = Cv \Rightarrow C = P_1/v_1 = 3000/0.11619 = 25820 \text{ kPa kg/m}^3$$

$$\text{State 2: } x_2 = 1 \text{ \& } P_2 = Cv_2 \text{ (on process line)}$$



Trial & error on $T_{2\text{sat}}$ or $P_{2\text{sat}}$:

Here from B.1.2:

$$\text{at 2 MPa } v_g = 0.09963 \Rightarrow C = P/v_g = 20074 \text{ (low)}$$

$$2.5 \text{ MPa } v_g = 0.07998 \Rightarrow C = P/v_g = 31258 \text{ (high)}$$

$$2.25 \text{ MPa } v_g = 0.08875 \Rightarrow C = P/v_g = 25352 \text{ (low)}$$

Now interpolate to match the right slope C :

$$P_2 = 2270 \text{ kPa, } v_2 = P_2/C = 2270/25820 = 0.0879 \text{ m}^3/\text{kg}$$

P is linear in V so the work becomes (area in P - v diagram)

$${}_1w_2 = \int P dv = \frac{1}{2}(P_1 + P_2)(v_2 - v_1)$$

$$= \frac{1}{2}(3000 + 2270)(0.0879 - 0.11619) = -74.5 \text{ kJ/kg}$$

4.57

Find the work for Problem 3.106.

Refrigerant-12 in a piston/cylinder arrangement is initially at 50°C , $x = 1$. It is then expanded in a process so that $P = Cv^{-1}$ to a pressure of 100 kPa. Find the final temperature and specific volume.

Solution:

Knowing the process (P versus V) and states 1 and 2 allows calculation of W.

State 1: 50°C , $x=1$ Table B.3.1: $P_1 = 1219.3$ kPa, $v_1 = 0.01417$ m³/kg


Process: $P = Cv^{-1} \Rightarrow {}_1w_2 = \int P dv = C \ln \frac{v_2}{v_1}$ same as Eq.4.5

State 2: 100 kPa and on process curve: $v_2 = v_1 P_1/P_2 = 0.1728$ m³/kg

From table B.3.2 $T = -13.2^\circ\text{C}$

The constant C for the work term is $P_1 v_1$ so per unit mass we get

$${}_1w_2 = P_1 v_1 \ln \frac{v_2}{v_1} = 1219.3 \times 0.01417 \times \ln \frac{0.1728}{0.01417} = 43.2 \text{ kJ/kg}$$

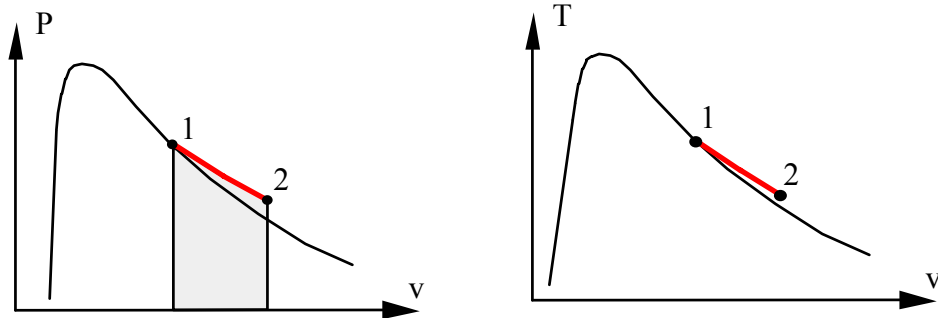

Notice T is not constant. It is not an ideal gas in this range.

4.58

A piston/cylinder contains water at 500°C, 3 MPa. It is cooled in a polytropic process to 200°C, 1 MPa. Find the polytropic exponent and the specific work in the process.

Solution:

Polytropic process: $Pv^n = C$

Both states must be on the process line: $P_2v_2^n = C = P_1v_1^n$

Take the ratio to get: $\frac{P_1}{P_2} = \left(\frac{v_2}{v_1}\right)^n$

and then take ln of the ratio: $\ln\left(\frac{P_1}{P_2}\right) = \ln\left(\frac{v_2}{v_1}\right)^n = n \ln\left(\frac{v_2}{v_1}\right)$

now solve for the exponent n

$$n = \ln\left(\frac{P_1}{P_2}\right) / \ln\left(\frac{v_2}{v_1}\right) = \frac{1.0986}{0.57246} = \mathbf{1.919}$$


$$\begin{aligned} {}_1w_2 &= \int P \, dv = \frac{P_2v_2 - P_1v_1}{1 - n} && \text{(Equation 4.4)} \\ &= \frac{1000 \times 0.20596 - 3000 \times 0.11619}{1 - 1.919} = \mathbf{155.2 \, kJ} \end{aligned}$$

4.59

Consider a two-part process with an expansion from 0.1 to 0.2 m³ at a constant pressure of 150 kPa followed by an expansion from 0.2 to 0.4 m³ with a linearly rising pressure from 150 kPa ending at 300 kPa. Show the process in a P-V diagram and find the boundary work.

Solution:

By knowing the pressure versus volume variation the work is found. If we plot the pressure versus the volume we see the work as the area below the process curve.

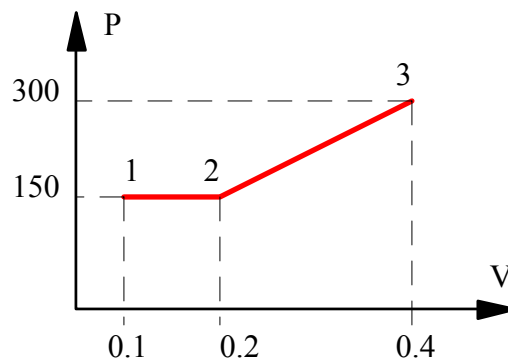


$$\begin{aligned}
 {}_1W_3 &= {}_1W_2 + {}_2W_3 = \int_1^2 P dV + \int_2^3 P dV \\
 &= P_1 (V_2 - V_1) + \frac{1}{2} (P_2 + P_3) (V_3 - V_2) \\
 &= 150 (0.2 - 0.1) + \frac{1}{2} (150 + 300) (0.4 - 0.2) = 15 + 45 = \mathbf{60 \text{ kJ}}
 \end{aligned}$$

4.60

A cylinder containing 1 kg of ammonia has an externally loaded piston. Initially the ammonia is at 2 MPa, 180°C and is now cooled to saturated vapor at 40°C, and then further cooled to 20°C, at which point the quality is 50%. Find the total work for the process, assuming a piecewise linear variation of P versus V .

Solution:

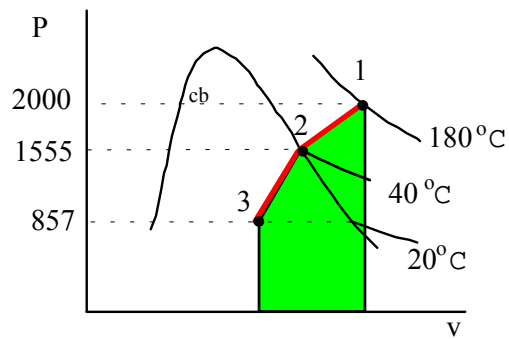

State 1: (T, P) Table B.2.2

$$v_1 = 0.10571 \text{ m}^3/\text{kg}$$

State 2: (T, x) Table B.2.1 sat. vap.

$$P_2 = 1555 \text{ kPa,}$$

$$v_2 = 0.08313 \text{ m}^3/\text{kg}$$

State 3: (T, x) $P_3 = 857 \text{ kPa, } v_3 = (0.001638 + 0.14922)/2 = 0.07543 \text{ m}^3/\text{kg}$

Sum the the work as two integrals each evaluated by the area in the P-v diagram.

$$\begin{aligned} {}_1W_3 &= \int_1^3 P dv \approx \left(\frac{P_1 + P_2}{2} \right) m(v_2 - v_1) + \left(\frac{P_2 + P_3}{2} \right) m(v_3 - v_2) \\ &= \frac{2000 + 1555}{2} 1(0.08313 - 0.10571) + \frac{1555 + 857}{2} 1(0.07543 - 0.08313) \\ &= -49.4 \text{ kJ} \end{aligned}$$

4.61

A piston/cylinder arrangement shown in Fig. P4.61 initially contains air at 150 kPa, 400°C. The setup is allowed to cool to the ambient temperature of 20°C.

- Is the piston resting on the stops in the final state? What is the final pressure in the cylinder?
- What is the specific work done by the air during this process?

Solution:

$$\text{State 1: } P_1 = 150 \text{ kPa, } T_1 = 400^\circ\text{C} = 673.2 \text{ K}$$

$$\text{State 2: } T_2 = T_0 = 20^\circ\text{C} = 293.2 \text{ K}$$

For all states air behave as an ideal gas.

- If piston at stops at 2, $V_2 = V_1/2$ and pressure less than $P_{\text{lift}} = P_1$


$$\Rightarrow P_2 = P_1 \times \frac{V_1}{V_2} \times \frac{T_2}{T_1} = 150 \times 2 \times \frac{293.2}{673.2} = 130.7 \text{ kPa} < P_1$$

\Rightarrow Piston is resting on stops at state 2.

- Work done while piston is moving at constant $P_{\text{ext}} = P_1$.

$${}_1W_2 = \int P_{\text{ext}} dV = P_1 (V_2 - V_1) ; \quad V_2 = \frac{1}{2} V_1 = \frac{1}{2} m RT_1/P_1$$

$${}_1w_2 = {}_1W_2/m = RT_1 \left(\frac{1}{2} - 1\right) = -\frac{1}{2} \times 0.287 \times 673.2 = \mathbf{-96.6 \text{ kJ/kg}}$$

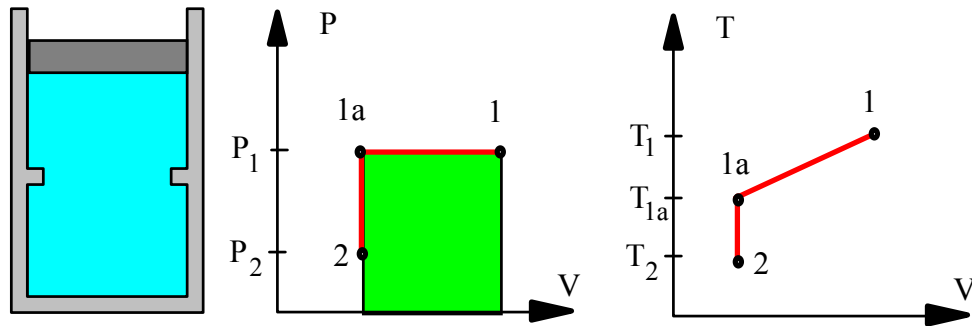

4.62


A piston cylinder has 1.5 kg of air at 300 K and 150 kPa. It is now heated up in a two step process. First constant volume to 1000 K (state 2) then followed by a constant pressure process to 1500 K, state 3. Find the final volume and the work in the process.

Solution:

The two processes are:

1 → 2: Constant volume $V_2 = V_1$

2 → 3: Constant pressure $P_3 = P_2$

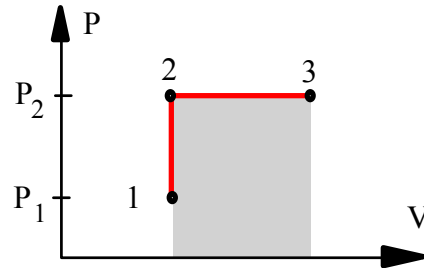

Use ideal gas approximation for air.

State 1: $T, P \Rightarrow V_1 = mRT_1/P_1 = 1.5 \times 0.287 \times 300 / 150 = 0.861 \text{ m}^3$

State 2: $V_2 = V_1 \Rightarrow P_2 = P_1 (T_2/T_1) = 150 \times 1000 / 300 = 500 \text{ kPa}$

State 3: $P_3 = P_2 \Rightarrow V_3 = V_2 (T_3/T_2) = 0.861 \times 1500 / 1000 = \mathbf{1.2915 \text{ m}^3}$

We find the work by summing along the process path.

$$\begin{aligned} {}_1W_3 &= {}_1W_2 + {}_2W_3 = {}_2W_3 = P_3(V_3 - V_2) \\ &= 500(1.2915 - 0.861) = \mathbf{215.3 \text{ kJ}} \end{aligned}$$

4.63

A piston/cylinder assembly (Fig. P4.63) has 1 kg of R-134a at state 1 with 110°C, 600 kPa, and is then brought to saturated vapor, state 2, by cooling while the piston is locked with a pin. Now the piston is balanced with an additional constant force and the pin is removed. The cooling continues to a state 3 where the R-134a is saturated liquid. Show the processes in a P-V diagram and find the work in each of the two steps, 1 to 2 and 2 to 3.

Solution :

CV R-134a This is a control mass.


Properties from table B.5.1 and 5.2

State 1: (T,P) B.5.2 $\Rightarrow v = 0.04943 \text{ m}^3/\text{kg}$

State 2: given by fixed volume $v_2 = v_1$ and $x_2 = 1.0$ so from B.5.1

$$v_2 = v_1 = v_g = 0.04943 \text{ m}^3/\text{kg} \Rightarrow T = 10^\circ\text{C}$$

State 3 reached at constant P ($F = \text{constant}$) $v_3 = v_f = 0.000794 \text{ m}^3/\text{kg}$

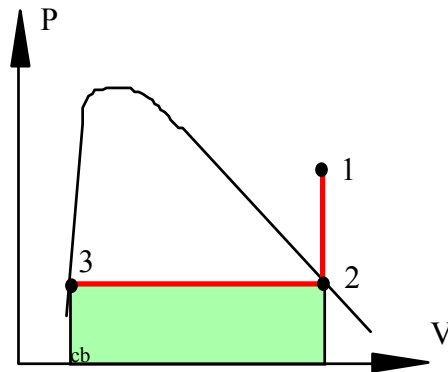

Since no volume change from 1 to 2 $\Rightarrow \mathbf{{}_1W_2 = 0}$

$$\begin{aligned} {}_2W_3 &= \int P \, dV = P(V_3 - V_2) = mP(v_3 - v_2) \quad \text{Constant pressure} \\ &= 415.8 (0.000794 - 0.04943) \, 1 = \mathbf{-20.22 \text{ kJ}} \end{aligned}$$

4.64

The refrigerant R-22 is contained in a piston/cylinder as shown in Fig. P4.64, where the volume is 11 L when the piston hits the stops. The initial state is -30°C , 150 kPa with a volume of 10 L. This system is brought indoors and warms up to 15°C .



- Is the piston at the stops in the final state?
- Find the work done by the R-22 during this process.

Solution:

Initially piston floats, $V < V_{\text{stop}}$ so the piston moves at constant $P_{\text{ext}} = P_1$ until it reaches the stops or 15°C , whichever is first.

- From Table B.4.2: $v_1 = 0.1487 \text{ m}^3/\text{kg}$,

$$m = V/v = \frac{0.010}{0.1487} = 0.06725 \text{ kg}$$

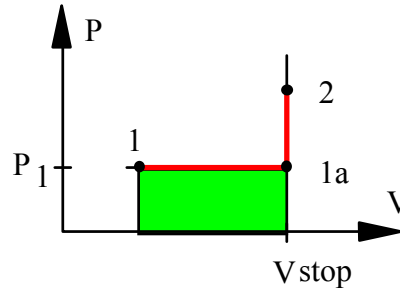

Check the temperature at state 1a: $P_{1a} = 150 \text{ kPa}$, $v = V_{\text{stop}}/m$.

$$v_{1a} = V/m = \frac{0.011}{0.06725} = 0.16357 \text{ m}^3/\text{kg} \Rightarrow T_{1a} = -9^{\circ}\text{C} \text{ \& } T_2 = 15^{\circ}\text{C}$$

Since $T_2 > T_{1a}$ then it follows that $P_2 > P_1$ and the piston is against stop.

- Work done at constant $P_{\text{ext}} = P_1$.

$${}_1W_2 = \int P_{\text{ext}} dV = P_{\text{ext}}(V_2 - V_1) = 150(0.011 - 0.010) = \mathbf{0.15 \text{ kJ}}$$

4.65

A piston/cylinder contains 50 kg of water at 200 kPa with a volume of 0.1 m³. Stops in the cylinder restricts the enclosed volume to 0.5 m³, similar to the setup in Problem 4.7. The water is now heated to 200°C. Find the final pressure, volume and the work done by the water.

Solution:

Initially the piston floats so the equilibrium lift pressure is 200 kPa

1: 200 kPa, $v_1 = 0.1/50 = 0.002 \text{ m}^3/\text{kg}$,

2: 200°C, on line

Check state 1a:

$$v_{\text{stop}} = 0.5/50 = 0.01 \text{ m}^3/\text{kg}$$

=>


Table B.1.2: 200 kPa, $v_f < v_{\text{stop}} < v_g$

State 1a is two phase at 200 kPa and $T_{\text{stop}} \approx 120.2 \text{ }^\circ\text{C}$ so as $T_2 > T_{\text{stop}}$ the state is higher up in the P-V diagram with

$$v_2 = v_{\text{stop}} < v_g = 0.127 \text{ m}^3/\text{kg} \text{ (at } 200^\circ\text{C)}$$

State 2 two phase => $P_2 = P_{\text{sat}}(T_2) = \mathbf{1.554 \text{ MPa}}$, $V_2 = V_{\text{stop}} = \mathbf{0.5 \text{ m}^3}$

$${}_1W_2 = {}_1W_{\text{stop}} = 200 (0.5 - 0.1) = \mathbf{80 \text{ kJ}}$$

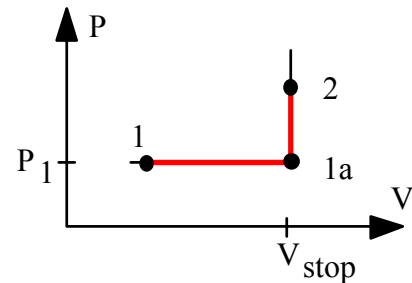


4.66

Find the work for Problem 3.108.

Ammonia in a piston/cylinder arrangement is at 700 kPa, 80°C. It is now cooled at constant pressure to saturated vapor (state 2) at which point the piston is locked with a pin. The cooling continues to -10°C (state 3). Show the processes 1 to 2 and 2 to 3 on both a P - v and T - v diagram.

Solution :

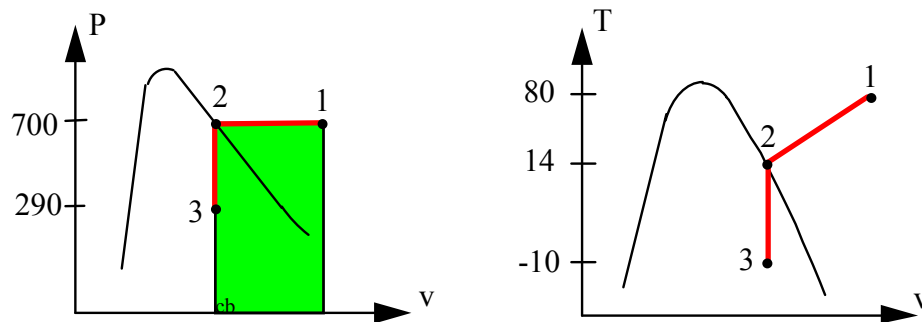

$${}_1W_3 = {}_1W_2 + {}_2W_3 = \int_1^2 P dv = P_1(V_2 - V_1) = mP_1(v_2 - v_1)$$

Since constant volume from 2 to 3, see P - v diagram. From table B.2

$$v_1 = 0.2367 \text{ m}^3/\text{kg}, \quad P_1 = 700 \text{ kPa}, \quad v_2 = v_g = 0.1815 \text{ m}^3/\text{kg}$$

$${}_1W_3 = P_1(v_2 - v_1) = 700 \times (0.1815 - 0.2367) = \mathbf{-38.64 \text{ kJ/kg}}$$

4.67

A piston/cylinder contains 1 kg of liquid water at 20°C and 300 kPa. Initially the piston floats, similar to the setup in Problem 4.64, with a maximum enclosed volume of 0.002 m³ if the piston touches the stops. Now heat is added so a final pressure of 600 kPa is reached. Find the final volume and the work in the process.

Solution:

Take CV as the water which is a control mass: $m_2 = m_1 = m$;

Table B.1.1: 20°C $\Rightarrow P_{\text{sat}} = 2.34$ kPa

State 1: Compressed liquid $v = v_f(20) = 0.001002$ m³/kg

State 1a: $v_{\text{stop}} = 0.002$ m³/kg, 300 kPa


State 2: Since $P_2 = 600$ kPa $> P_{\text{lift}}$ then piston is pressed against the stops

$$v_2 = v_{\text{stop}} = 0.002 \text{ m}^3/\text{kg} \text{ and } V = 0.002 \text{ m}^3$$

For the given P : $v_f < v < v_g$ so 2-phase $T = T_{\text{sat}} = 158.85$ °C

Work is done while piston moves at $P_{\text{lift}} = \text{constant} = 300$ kPa so we get

$${}_1W_2 = \int P \, dV = m P_{\text{lift}}(v_2 - v_1) = 1 \times 300(0.002 - 0.001002) = \mathbf{0.30 \text{ kJ}}$$

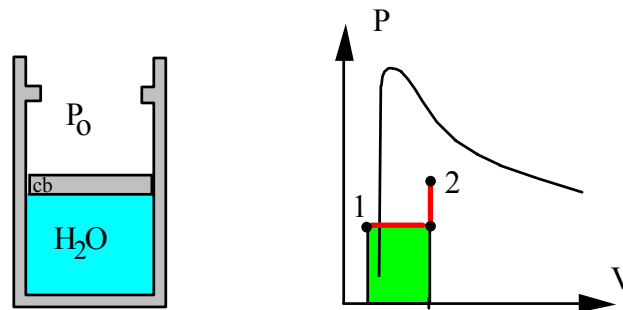

4.68

10 kg of water in a piston cylinder arrangement exists as saturated liquid/vapor at 100 kPa, with a quality of 50%. It is now heated so the volume triples. The mass of the piston is such that a cylinder pressure of 200 kPa will float it.

- Find the final temperature and volume of the water.
- Find the work given out by the water.

Solution:

Take CV as the water $m_2 = m_1 = m$;

Process: $v = \text{constant}$ until $P = P_{\text{lift}}$ then P is constant.



State 1: $v_1 = v_f + x v_{fg} = 0.001043 + 0.5 \times 1.69296 = 0.8475 \text{ m}^3/\text{kg}$

State 2: $v_2, P_2 \leq P_{\text{lift}} \Rightarrow v_2 = 3 \times 0.8475 = 2.5425 \text{ m}^3/\text{kg}$;

$T_2 = 829^\circ\text{C}$; $V_2 = m v_2 = 25.425 \text{ m}^3$

$${}_1W_2 = \int P dV = P_{\text{lift}} \times (V_2 - V_1)$$

$$= 200 \text{ kPa} \times 10 \text{ kg} \times (2.5425 - 0.8475) \text{ m}^3/\text{kg} = 3390 \text{ kJ}$$

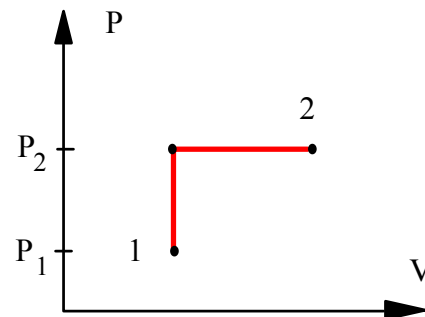

4.69

Find the work in Problem 3.43.

Ammonia at 10°C with a mass of 10 kg is in a piston cylinder arrangement with an initial volume of 1 m^3 . The piston initially resting on the stops has a mass such that a pressure of 900 kPa will float it. The ammonia is now slowly heated to 50°C . Find the work in the process.


C.V. Ammonia, constant mass.

Process: $V = \text{constant}$ unless $P = P_{\text{float}}$

$$\text{State 1: } T = 10^\circ\text{C}, \quad v_1 = \frac{V}{m} = \frac{1}{10} = 0.1 \text{ m}^3/\text{kg}$$

$$\text{From Table B.2.1 } v_f < v < v_g$$

$$x_1 = (v - v_f)/v_{fg} = (0.1 - 0.0016)/0.20381 \\ = 0.4828$$

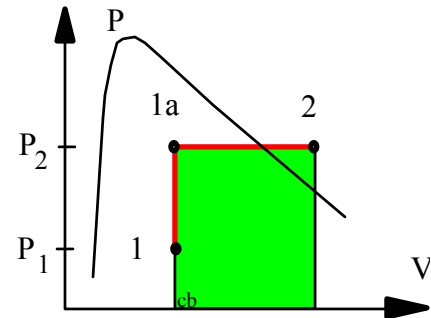

State 1a: $P = 900 \text{ kPa}$, $v = v_1 = 0.1 < v_g$ at 900 kPa

This state is two-phase $T_{1a} = 21.52^\circ\text{C}$

Since $T_2 > T_{1a}$ then $v_2 > v_{1a}$

State 2: 50°C and on line(s) means 900 kPa which is superheated vapor.

From Table B.2.2 linear interpolation between 800 and 1000 kPa:

$$v_2 = 0.1648 \text{ m}^3/\text{kg}, \quad V_2 = mv_2 = 1.648 \text{ m}^3$$

$${}_1W_2 = \int P \, dV = P_{\text{float}} (V_2 - V_1) = 900 (1.648 - 1.0) = \mathbf{583.2 \text{ kJ}}$$

4.70

A piston cylinder setup similar to Problem 4.68 contains 0.1 kg saturated liquid and vapor water at 100 kPa with quality 25%. The mass of the piston is such that a pressure of 500 kPa will float it. The water is heated to 300°C. Find the final pressure, volume and the work, ${}_1W_2$.

Solution:

Take CV as the water: $m_2 = m_1 = m$

Process: $v = \text{constant until } P = P_{\text{lift}}$

To locate state 1: Table B.1.2

$$v_1 = 0.001043 + 0.25 \times 1.69296 = 0.42428 \text{ m}^3/\text{kg}$$

$$1a: v_{1a} = v_1 = 0.42428 \text{ m}^3/\text{kg} > v_g \text{ at } 500 \text{ kPa}$$


so state 1a is Sup.Vapor $T_{1a} = 200^\circ\text{C}$

State 2 is 300°C so heating continues after state 1a to 2 at constant P =>

$$2: T_2, P_2 = P_{\text{lift}} \Rightarrow \text{Tbl B.1.3 } v_2 = 0.52256 \text{ m}^3/\text{kg};$$

$$V_2 = mv_2 = 0.05226 \text{ m}^3$$

$${}_1W_2 = P_{\text{lift}} (V_2 - V_1) = 500(0.05226 - 0.04243) = 4.91 \text{ kJ}$$



Other types of work and general concepts**4.71**

A 0.5-m-long steel rod with a 1-cm diameter is stretched in a tensile test. What is the required work to obtain a relative strain of 0.1%? The modulus of elasticity of steel is 2×10^8 kPa.

Solution :

$${}_1W_2 = \frac{AEL_0}{2} (e)^2, \quad A = \frac{\pi}{4} (0.01)^2 = 78.54 \times 10^{-6} \text{ m}^2$$
$${}_1W_2 = \frac{78.54 \times 10^{-6} \times 2 \times 10^8 \times 0.5}{2} (10^{-3})^2 = \mathbf{3.93 \text{ J}}$$

4.72

A copper wire of diameter 2 mm is 10 m long and stretched out between two posts. The normal stress (pressure) $\sigma = E(L - L_0)/L_0$, depends on the length L versus the unstretched length L_0 and Young's modulus $E = 1.1 \times 10^6$ kPa. The force is $F = A\sigma$ and measured to be 110 N. How much longer is the wire and how much work was put in?

Solution:

$$F = As = A E \Delta L / L_0 \quad \text{and} \quad \Delta L = FL_0 / AE$$

$$A = \frac{\pi}{4} D^2 = \frac{\pi}{4} \times 0.002^2 = 3.142 \times 10^{-6} \text{ m}^2$$

$$\Delta L = \frac{110 \times 10}{3.142 \times 10^{-6} \times 1.1 \times 10^6 \times 10^3} = \mathbf{0.318 \text{ m}}$$

$$\begin{aligned} {}_1W_2 &= \int F \, dx = \int A s \, dx = \int AE \frac{x}{L_0} \, dx \\ &= \frac{AE}{L_0} \frac{1}{2} x^2 \quad \text{where } x = L - L_0 \\ &= \frac{3.142 \times 10^{-6} \times 1.1 \times 10^6 \times 10^3}{10} \times \frac{1}{2} \times 0.318^2 = \mathbf{17.47 \text{ J}} \end{aligned}$$

4.73

A film of ethanol at 20°C has a surface tension of 22.3 mN/m and is maintained on a wire frame as shown in Fig. P4.73. Consider the film with two surfaces as a control mass and find the work done when the wire is moved 10 mm to make the film 20 × 40 mm.

Solution :

Assume a free surface on both sides of the frame, i.e., there are two surfaces 20 × 30 mm

$$\begin{aligned} W &= -\int S \, dA = -22.3 \times 10^{-3} \times 2(800 - 600) \times 10^{-6} \\ &= -8.92 \times 10^{-6} \text{ J} = \mathbf{-8.92 \, \mu\text{J}} \end{aligned}$$

4.74

Assume a balloon material with a constant surface tension of $S = 2 \text{ N/m}$. What is the work required to stretch a spherical balloon up to a radius of $r = 0.5 \text{ m}$? Neglect any effect from atmospheric pressure.

Assume the initial area is small, and that we have 2 surfaces inside and out

$$\begin{aligned} W &= -\int S \, dA = -S (A_2 - A_1) \\ &= -S(A_2) = -S(2 \times \pi D_2^2) \\ &= -2 \times 2 \times \pi \times 1 = -12.57 \text{ J} \\ W_{\text{in}} &= -W = \mathbf{12.57 \text{ J}} \end{aligned}$$

4.75

A soap bubble has a surface tension of $S = 3 \times 10^{-4}$ N/cm as it sits flat on a rigid ring of diameter 5 cm. You now blow on the film to create a half sphere surface of diameter 5 cm. How much work was done?

$$\begin{aligned}
 {}_1W_2 &= \int F \, dx = \int S \, dA = S \Delta A \\
 &= 2 \times S \times \left(\frac{\pi}{2} D^2 - \frac{\pi}{4} D^2 \right) \\
 &= 2 \times 3 \times 10^{-4} \times 100 \times \frac{\pi}{2} 0.05^2 (1 - 0.5) \\
 &= \mathbf{1.18 \times 10^{-4} \, J}
 \end{aligned}$$

Notice the bubble has 2 surfaces.

$$\begin{aligned}
 A_1 &= \frac{\pi}{4} D^2, \\
 A_2 &= \frac{1}{2} \pi D^2
 \end{aligned}$$



4.76

Assume we fill a spherical balloon from a bottle of helium gas. The helium gas provides work $\int P dV$ that stretches the balloon material $\int S dA$ and pushes back the atmosphere $\int P_o dV$. Write the incremental balance for $dW_{\text{helium}} = dW_{\text{stretch}} + dW_{\text{atm}}$ to establish the connection between the helium pressure, the surface tension S and P_o as a function of radius.

$$W_{\text{He}} = \int P dV = \int S dA + \int P_o dV$$

$$dW_{\text{He}} = P dV = S dA + P_o dV$$

$$dV = d\left(\frac{\pi}{6} D^3\right) = \frac{\pi}{6} \times 3D^2 dD$$

$$dA = d(2 \times \pi \times D^2) = 2\pi (2D) dD$$

$$P \frac{\pi}{2} D^2 dD = S (4\pi) D dD + P_o \frac{\pi}{2} D^2 dD$$

$$P_{\text{He}} = P_o + 8 \frac{S}{D}$$

4.77

A sheet of rubber is stretched out over a ring of radius 0.25 m. I pour liquid water at 20°C on it so the rubber forms a half sphere (cup). Neglect the rubber mass and find the surface tension near the ring?


Solution:

$$F \uparrow = F \downarrow ; F \uparrow = SL$$

The length is the perimeter, $2\pi r$, and there is two surfaces

$$S \times 2 \times 2\pi r = m_{\text{H}_2\text{O}} g = \rho_{\text{H}_2\text{O}} V g = \rho_{\text{H}_2\text{O}} \times \frac{1}{12} \pi (2r)^3 g = \rho_{\text{H}_2\text{O}} \times \pi \frac{2}{3} r^3 g$$

$$S = \rho_{\text{H}_2\text{O}} \frac{1}{6} r^2 g = 997 \times \frac{1}{6} \times 0.25^2 \times 9.81 = \mathbf{101.9 \text{ N/m}}$$

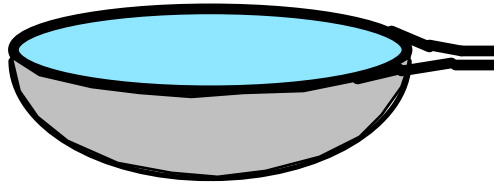


4.78

Consider a window-mounted air conditioning unit used in the summer to cool incoming air. Examine the system boundaries for rates of work and heat transfer, including signs.

Solution :

Air-conditioner unit, steady operation with no change of temperature of AC unit.

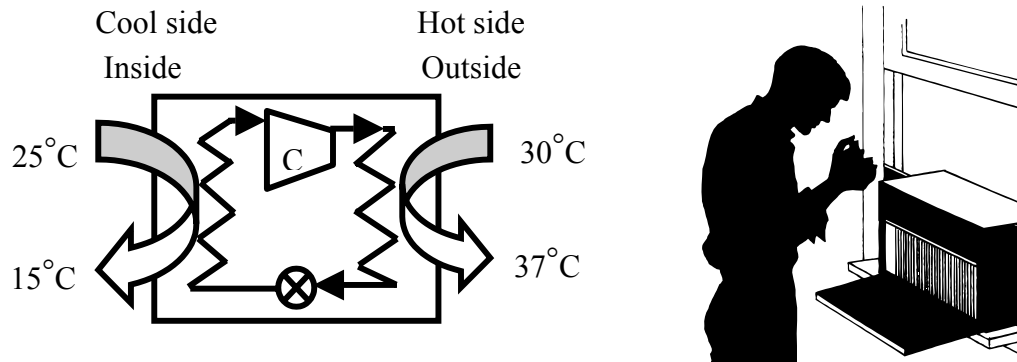

- electrical work (power) input operates unit,
- +Q rate of heat transfer from the room,
- a larger -Q rate of heat transfer (sum of the other two energy rates) out to the outside air.

4.79

Consider a hot-air heating system for a home. Examine the following systems for heat transfer.

- a) The combustion chamber and combustion gas side of the heat transfer area.
- b) The furnace as a whole, including the hot- and cold-air ducts and chimney.

Solution:

- a) Fuel and air enter, warm products of the combustion exit, large $-Q$ to the air in the duct system, small $-Q$ loss directly to the room.

- b) Fuel and air enter, warm products exit through the chimney, cool air into the cold air return duct, warm air exit hot-air duct to heat the house. Small heat transfer losses from furnace, chimney and ductwork to the house.

4.80

Consider a household refrigerator that has just been filled up with room-temperature food. Define a control volume (mass) and examine its boundaries for rates of work and heat transfer, including sign.

- a. Immediately after the food is placed in the refrigerator
- b. After a long period of time has elapsed and the food is cold

Solution:

I. C.V. Food.

- a) short term.: $-Q$ from warm food to cold refrigerator air. Food cools.
- b) Long term: $-Q$ goes to zero after food has reached refrigerator T.

II. C.V. refrigerator space, not food, not refrigerator system

- a) short term: $+Q$ from the warm food, $+Q$ from heat leak from room into cold space. $-Q$ (sum of both) to refrigeration system. If not equal the refrigerator space initially warms slightly and then cools down to preset T.
- b) long term: small $-Q$ heat leak balanced by $-Q$ to refrigeration system.

Note: For refrigeration system CV any Q in from refrigerator space plus electrical W input to operate system, sum of which is Q rejected to the room.

4.81

A room is heated with an electric space heater on a winter day. Examine the following control volumes, regarding heat transfer and work, including sign.

- a) The space heater.
- b) Room
- c) The space heater and the room together

Solution:

- a) The space heater.

Electrical work (power) input, and equal (after system warm up) Q out to the room.

- b) Room

Q input from the heater balances Q loss to the outside, for steady (no temperature change) operation.

- c) The space heater and the room together

Electrical work input balances Q loss to the outside, for steady operation.

Rates of work**4.82**

An escalator raises a 100 kg bucket of sand 10 m in 1 minute. Determine the rate of work done during the process.

Solution:

The work is a force with a displacement and force is constant: $F = mg$

$$W = \int F dx = F \int dx = F \Delta x = 100 \text{ kg} \times 9.80665 \text{ m/s}^2 \times 10 \text{ m} = 9807 \text{ J}$$

The rate of work is work per unit time

$$\dot{W} = \frac{W}{\Delta t} = \frac{9807 \text{ J}}{60 \text{ s}} = \mathbf{163 \text{ W}}$$

4.83

A car uses 25 hp to drive at a horizontal level at constant 100 km/h. What is the traction force between the tires and the road?

Solution:

We need to relate the rate of work to the force and velocity

$$dW = F dx \quad \Rightarrow \quad \frac{dW}{dt} = \dot{W} = F \frac{dx}{dt} = F\mathbf{V}$$

$$F = \dot{W} / \mathbf{V}$$

$$\dot{W} = 25 \text{ hp} = 25 \times 0.7355 \text{ kW} = 18.39 \text{ kW}$$

$$\mathbf{V} = 100 \times \frac{1000}{3600} = 27.78 \text{ m/s}$$

$$F = \dot{W} / \mathbf{V} = (18.39 / 27.78) \text{ kN} = \mathbf{0.66 \text{ kN}}$$

$$\text{Units: } \text{kW} / (\text{ms}^{-1}) = \text{kW s m}^{-1} = \text{kJ s}^{-1} \text{s m}^{-1} = \text{kN m m}^{-1} = \text{kN}$$

4.84

A piston/cylinder of cross sectional area 0.01 m^2 maintains constant pressure. It contains 1 kg water with a quality of 5% at 150°C . If we heat so 1 g/s liquid turns into vapor what is the rate of work out?

$$V_{\text{vapor}} = m_{\text{vapor}} v_g, \quad V_{\text{liq}} = m_{\text{liq}} v_f$$

$$m_{\text{tot}} = \text{constant} = m_{\text{vapor}} + m_{\text{liq}}$$

$$V_{\text{tot}} = V_{\text{vapor}} + V_{\text{liq}}$$

$$\dot{m}_{\text{tot}} = 0 = \dot{m}_{\text{vapor}} + \dot{m}_{\text{liq}} \Rightarrow \dot{m}_{\text{liq}} = -\dot{m}_{\text{vapor}}$$

$$\begin{aligned} \dot{V}_{\text{tot}} &= \dot{V}_{\text{vapor}} + \dot{V}_{\text{liq}} = \dot{m}_{\text{vapor}} v_g + \dot{m}_{\text{liq}} v_f \\ &= \dot{m}_{\text{vapor}} (v_g - v_f) = \dot{m}_{\text{vapor}} v_{fg} \end{aligned}$$

$$\begin{aligned} \dot{W} &= P \dot{V} = P \dot{m}_{\text{vapor}} v_{fg} \\ &= 475.9 \times 0.001 \times 0.39169 = \mathbf{0.1864 \text{ kW}} \\ &= \mathbf{186 \text{ W}} \end{aligned}$$

4.85

A crane lifts a bucket of cement with a total mass of 450 kg vertically up with a constant velocity of 2 m/s. Find the rate of work needed to do that.

Solution:

Rate of work is force times rate of displacement. The force is due to gravity ($a = 0$) alone.

$$\dot{W} = F\mathbf{V} = mg \times \mathbf{V} = 450 \text{ kg} \times 9.807 \text{ ms}^{-2} \times 2 \text{ ms}^{-1} = 8826 \text{ J/s}$$

$$\dot{W} = \mathbf{8.83 \text{ kW}}$$

4.86

Consider the car with the rolling resistance as in problem 4.27. How fast can it drive using 30 hp?

$$F = 0.006 \text{ mg}$$

$$\text{Power} = F \times \mathbf{V} = 30 \text{ hp} = \dot{W}$$

$$\mathbf{V} = \dot{W} / F = \frac{\dot{W}}{0.006 \text{ mg}} = \frac{30 \times 0.7457 \times 1000}{0.006 \times 1200 \times 9.81} = \mathbf{271.5 \text{ m/s}}$$

Comment : This is a very high velocity, the rolling resistance is low relative to the air resistance.

4.87

Consider the car with the air drag force as in problem 4.29. How fast can it drive using 30 hp?

$$\rho = \frac{1}{v} = \frac{P}{RT} = \frac{100}{0.287 \times 290} = 1.2015 \frac{\text{kg}}{\text{m}^3} \quad \text{and} \quad A = 4 \text{ m}^2$$

$$\text{Drag force:} \quad F_{\text{drag}} = 0.225 A \rho \mathbf{V}^2$$

$$\text{Power for drag force:} \quad \dot{W}_{\text{drag}} = 30 \text{ hp} \times 0.7457 = 22.371 \text{ kW}$$

$$\dot{W}_{\text{drag}} = F_{\text{drag}} \mathbf{V} = 0.225 \times 4 \times 1.2015 \times \mathbf{V}^3$$

$$\mathbf{V}^3 = \dot{W}_{\text{drag}} / (0.225 \times 4 \times 1.2015) = 20 \text{ 688}$$

$$\mathbf{V} = 27.452 \text{ m/s} = 27.452 \times \frac{3600}{1000} = \mathbf{98.8 \text{ km/h}}$$

4.88

Consider a 1400 kg car having the rolling resistance as in problem 4.27 and air resistance as in problem 4.29. How fast can it drive using 30 hp?

$$F_{\text{tot}} = F_{\text{rolling}} + F_{\text{air}} = 0.006 mg + 0.225 A\rho\mathbf{V}^2$$

$$m = 1400 \text{ kg}, A = 4 \text{ m}^2$$

$$\rho = P/RT = 1.2015 \text{ kg/m}^3$$

$$\dot{W} = F\mathbf{V} = 0.006 mg\mathbf{V} + 0.225 \rho A\mathbf{V}^3$$

Nonlinear in \mathbf{V} so solve by trial and error.

$$\dot{W} = 30 \text{ hp} = 30 \times 0.7355 \text{ kW} = 22.06 \text{ kW}$$

$$= 0.0006 \times 1400 \times 9.807 \mathbf{V} + 0.225 \times 1.2015 \times 4 \mathbf{V}^3$$

$$= 82.379\mathbf{V} + 1.08135 \mathbf{V}^3$$

$$\mathbf{V} = 25 \text{ m/s} \Rightarrow \dot{W} = 18\,956 \text{ W}$$

$$\mathbf{V} = 26 \text{ m/s} \quad \dot{W} = 21\,148 \text{ W}$$

$$\mathbf{V} = 27 \text{ m/s} \quad \dot{W} = 23\,508 \text{ W}$$

Linear interpolation

$$\mathbf{V} = 26.4 \text{ m/s} = \mathbf{95 \text{ km/h}}$$

4.89

A battery is well insulated while being charged by 12.3 V at a current of 6 A. Take the battery as a control mass and find the instantaneous rate of work and the total work done over 4 hours.

Solution :

Battery thermally insulated $\Rightarrow Q = 0$

For constant voltage E and current i ,

$$\text{Power} = E i = 12.3 \times 6 = \mathbf{73.8 \text{ W}} \quad [\text{Units } \text{V} \times \text{A} = \text{W}]$$

$$W = \int \text{power } dt = \text{power } \Delta t$$


$$= 73.8 \times 4 \times 60 \times 60 = 1\,062\,720 \text{ J} = \mathbf{1062.7 \text{ kJ}}$$

4.90

A current of 10 amp runs through a resistor with a resistance of 15 ohms. Find the rate of work that heats the resistor up.

Solution:

$$\dot{W} = \text{power} = E i = R i^2 = 15 \times 10 \times 10 = \mathbf{1500 \text{ W}}$$

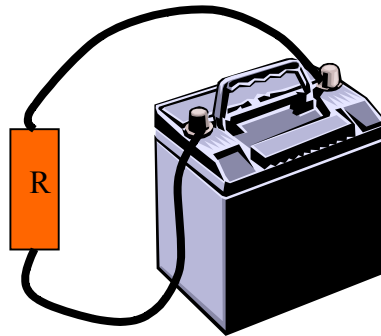


4.91

A pressure of 650 kPa pushes a piston of diameter 0.25 m with $\mathbf{V} = 5$ m/s. What is the volume displacement rate, the force and the transmitted power?

$$A = \frac{\pi}{4} D^2 = 0.049087 \text{ m}^2$$

$$\dot{V} = A\mathbf{V} = 0.049087 \text{ m}^2 \times 5 \text{ m/s} = \mathbf{0.2454 \text{ m}^3/\text{s}}$$

$$\dot{W} = \text{power} = F\mathbf{V} = P\dot{V} = 650 \text{ kPa} \times 0.2454 \text{ m}^3/\text{s} = \mathbf{159.5 \text{ kW}}$$

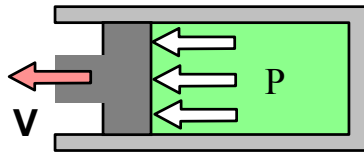

4.92


Assume the process in Problem 4.37 takes place with a constant rate of change in volume over 2 minutes. Show the power (rate of work) as a function of time.

Solution:

$$W = \int P \, dV \quad \text{since } 2 \text{ min} = 120 \text{ secs}$$

$$\dot{W} = P (\Delta V / \Delta t)$$

$$(\Delta V / \Delta t) = 0.3 / 120 = \mathbf{0.0025 \text{ m}^3/\text{s}}$$

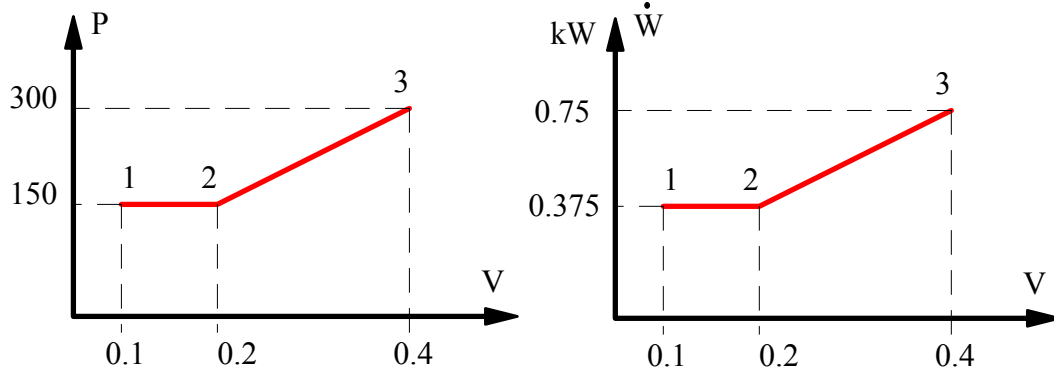

4.93

Air at a constant pressure in a piston cylinder is at 300 kPa, 300 K and a volume of 0.1 m³. It is heated to 600 K over 30 seconds in a process with constant piston velocity. Find the power delivered to the piston.

Solution:

$$\text{Process: } P = \text{constant} : \quad dW = P dV \quad \Rightarrow \quad \dot{W} = P\dot{V}$$

$$V_2 = V_1 \times (T_2/T_1) = 0.1 \times (600/300) = 0.2$$

$$\dot{W} = P (\Delta V / \Delta t) = 300 \times (0.2-0.1)/30 = \mathbf{1 \text{ kW}}$$

4.94

A torque of 650 Nm rotates a shaft of diameter 0.25 m with $\omega = 50$ rad/s. What are the shaft surface speed and the transmitted power?

Solution:

$$\mathbf{V} = \omega r = \omega D/2 = 50 \times 0.25 / 2 = \mathbf{6.25 \text{ m/s}}$$

$$\text{Power} = T\omega = 650 \times 50 \text{ Nm/s} = 32\,500 \text{ W} = \mathbf{32.5 \text{ kW}}$$

Heat Transfer rates

4.95

The sun shines on a 150 m^2 road surface so it is at 45°C . Below the 5 cm thick asphalt, average conductivity of 0.06 W/m K , is a layer of compacted rubbles at a temperature of 15°C . Find the rate of heat transfer to the rubbles.

Solution :

This is steady one dimensional conduction through the asphalt layer.

$$\begin{aligned}\dot{Q} &= k A \frac{\Delta T}{\Delta x} \\ &= 0.06 \times 150 \times \frac{45-15}{0.05} \\ &= \mathbf{5400 \text{ W}}\end{aligned}$$



4.96

A pot of steel, conductivity 50 W/m K, with a 5 mm thick bottom is filled with 15°C liquid water. The pot has a diameter of 20 cm and is now placed on an electric stove that delivers 250 W as heat transfer. Find the temperature on the outer pot bottom surface assuming the inner surface is at 15°C.


Solution :

Steady conduction through the bottom of the steel pot. Assume the inside surface is at the liquid water temperature.

$$\dot{Q} = k A \frac{\Delta T}{\Delta x} \Rightarrow \Delta T = \dot{Q} \Delta x / kA$$

$$\Delta T = 250 \times 0.005 / (50 \times \frac{\pi}{4} \times 0.2^2) = 0.796$$

$$T = 15 + 0.796 \cong \mathbf{15.8^\circ C}$$

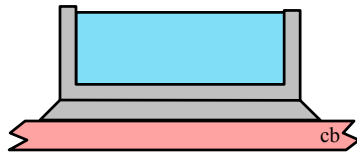

4.97


A water-heater is covered up with insulation boards over a total surface area of 3 m^2 . The inside board surface is at 75°C and the outside surface is at 20°C and the board material has a conductivity of 0.08 W/m K . How thick a board should it be to limit the heat transfer loss to 200 W ?

Solution :

Steady state conduction through a single layer board.

$$\dot{Q}_{\text{cond}} = k A \frac{\Delta T}{\Delta x} \Rightarrow \Delta x = k A \Delta T / \dot{Q}$$

$$\Delta x = 0.08 \times 3 \times \frac{75 - 20}{200} = \mathbf{0.066 \text{ m}}$$

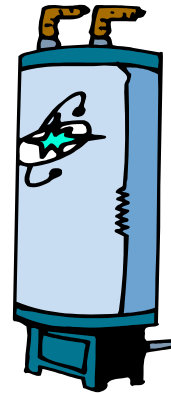

4.98

You drive a car on a winter day with the atmospheric air at -15°C and you keep the outside front windshield surface temperature at $+2^{\circ}\text{C}$ by blowing hot air on the inside surface. If the windshield is 0.5 m^2 and the outside convection coefficient is $250\text{ W/m}^2\text{K}$ find the rate of energy loss through the front windshield. For that heat transfer rate and a 5 mm thick glass with $k = 1.25\text{ W/mK}$ what is then the inside windshield surface temperature?

Solution :

The heat transfer from the inside must match the loss on the outer surface to give a steady state (frost free) outside surface temperature.


$$\begin{aligned}\dot{Q}_{\text{conv}} &= h A \Delta T = 250 \times 0.5 \times [2 - (-15)] \\ &= 250 \times 0.5 \times 17 = \mathbf{2125\text{ W}}\end{aligned}$$

This is a substantial amount of power.

$$\dot{Q}_{\text{cond}} = k A \frac{\Delta T}{\Delta x} \quad \Rightarrow \quad \Delta T = \frac{\dot{Q}}{kA} \Delta x$$

$$\Delta T = \frac{2125\text{ W}}{1.25\text{ W/mK} \times 0.5\text{ m}^2} 0.005\text{ m} = 17\text{ K}$$

$$T_{\text{in}} = T_{\text{out}} + \Delta T = 2 + 17 = \mathbf{19^{\circ}\text{C}}$$

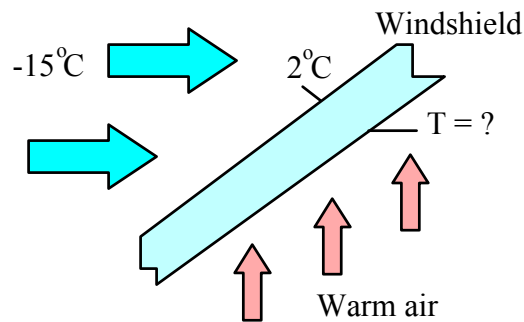

4.99


A large condenser (heat exchanger) in a power plant must transfer a total of 100 MW from steam running in a pipe to sea water being pumped through the heat exchanger. Assume the wall separating the steam and seawater is 4 mm of steel, conductivity 15 W/m K and that a maximum of 5°C difference between the two fluids is allowed in the design. Find the required minimum area for the heat transfer neglecting any convective heat transfer in the flows.

Solution :

Steady conduction through the 4 mm steel wall.

$$\dot{Q} = k A \frac{\Delta T}{\Delta x} \Rightarrow A = \dot{Q} \Delta x / k \Delta T$$

$$A = 100 \times 10^6 \times 0.004 / (15 \times 5) = \mathbf{480 \text{ m}^2}$$

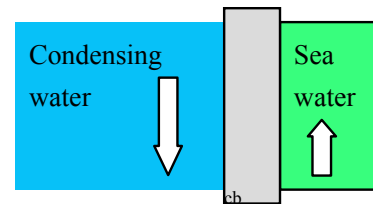

4.100

The black grille on the back of a refrigerator has a surface temperature of 35°C with a total surface area of 1 m². Heat transfer to the room air at 20°C takes place with an average convective heat transfer coefficient of 15 W/m² K. How much energy can be removed during 15 minutes of operation?

Solution :

$$\dot{Q} = hA \Delta T; \quad Q = \dot{Q} \Delta t = hA \Delta T \Delta t$$
$$Q = 15 \times 1 \times (35-20) \times 15 \times 60 = 202500 \text{ J} = \mathbf{202.5 \text{ kJ}}$$

4.101

Due to a faulty door contact the small light bulb (25 W) inside a refrigerator is kept on and limited insulation lets 50 W of energy from the outside seep into the refrigerated space. How much of a temperature difference to the ambient at 20°C must the refrigerator have in its heat exchanger with an area of 1 m² and an average heat transfer coefficient of 15 W/m² K to reject the leaks of energy.

Solution :

$$\dot{Q}_{\text{tot}} = 25 + 50 = 75 \text{ W to go out}$$

$$\dot{Q} = hA\Delta T = 15 \times 1 \times \Delta T = 75$$

$$\Delta T = \dot{Q} / hA = 75 / (15 \times 1) = 5 \text{ }^\circ\text{C}$$

OR T must be at least **25 °C**

4.102

The brake shoe and steel drum on a car continuously absorbs 25 W as the car slows down. Assume a total outside surface area of 0.1 m^2 with a convective heat transfer coefficient of $10 \text{ W/m}^2 \text{ K}$ to the air at 20°C . How hot does the outside brake and drum surface become when steady conditions are reached?

Solution :

$$\begin{aligned}\dot{Q} &= hA\Delta T \Rightarrow \Delta T = \dot{Q} / hA \\ \Delta T &= (T_{\text{BRAKE}} - 20) = 25 / (10 \times 0.1) = \mathbf{25^\circ\text{C}} \\ T_{\text{BRAKE}} &= 20 + 25 = \mathbf{45^\circ\text{C}}\end{aligned}$$

4.103

A wall surface on a house is at 30°C with an emissivity of $\varepsilon = 0.7$. The surrounding ambient to the house is at 15°C, average emissivity of 0.9. Find the rate of radiation energy from each of those surfaces per unit area.

Solution :

$$\dot{Q}/A = \varepsilon\sigma AT^4, \quad \sigma = 5.67 \times 10^{-8}$$

a) $\dot{Q}/A = 0.7 \times 5.67 \times 10^{-8} \times (273.15 + 30)^4 = \mathbf{335 \text{ W/m}^2}$

b) $\dot{Q}/A = 0.9 \times 5.67 \times 10^{-8} \times 288.15^4 = \mathbf{352 \text{ W/m}^2}$

4.104

A log of burning wood in the fireplace has a surface temperature of 450°C. Assume the emissivity is 1 (perfect black body) and find the radiant emission of energy per unit surface area.

Solution :

$$\begin{aligned}\dot{Q}/A &= 1 \times \sigma T^4 \\ &= 5.67 \times 10^{-8} \times (273.15 + 450)^4 \\ &= 15505 \text{ W/m}^2 \\ &= \mathbf{15.5 \text{ kW/m}^2}\end{aligned}$$



4.105

A radiant heat lamp is a rod, 0.5 m long and 0.5 cm in diameter, through which 400 W of electric energy is deposited. Assume the surface has an emissivity of 0.9 and neglect incoming radiation. What will the rod surface temperature be ?

Solution :

For constant surface temperature outgoing power equals electric power.

$$\dot{Q}_{\text{rad}} = \varepsilon \sigma A T^4 = \dot{Q}_{\text{el}} \Rightarrow$$


$$T^4 = \dot{Q}_{\text{el}} / \varepsilon \sigma A = 400 / (0.9 \times 5.67 \times 10^{-8} \times 0.5 \times \pi \times 0.005)$$

$$= 9.9803 \times 10^{11} \text{ K}^4 \Rightarrow T \cong \mathbf{1000 \text{ K} \text{ OR } 725 \text{ }^\circ\text{C}}$$

Review Problems**4.106**

A vertical cylinder (Fig. P4.106) has a 61.18-kg piston locked with a pin trapping 10 L of R-22 at 10°C, 90% quality inside. Atmospheric pressure is 100 kPa, and the cylinder cross-sectional area is 0.006 m². The pin is removed, allowing the piston to move and come to rest with a final temperature of 10°C for the R-22. Find the final pressure, final volume and the work done by the R-22.

Solution:



State 1: (T, x) from table B.4.1

$$v_1 = 0.0008 + 0.9 \times 0.03391 = 0.03132 \text{ m}^3/\text{kg}$$

$$m = V_1/v_1 = 0.010/0.03132 = 0.319 \text{ kg}$$

Force balance on piston gives the equilibrium pressure

$$P_2 = P_0 + m_p g / A_p = 100 + \frac{61.18 \times 9.807}{0.006 \times 1000} = \mathbf{200 \text{ kPa}}$$

State 2: (T,P) in Table B.4.2 $v_2 = 0.13129 \text{ m}^3/\text{kg}$

$$V_2 = m v_2 = 0.319 \text{ kg} \times 0.13129 \text{ m}^3/\text{kg} = 0.04188 \text{ m}^3 = \mathbf{41.88 \text{ L}}$$

$${}_1W_2 = \int P_{\text{equil}} dV = P_2(V_2 - V_1) = 200 \text{ kPa} (0.04188 - 0.010) \text{ m}^3 = \mathbf{6.38 \text{ kJ}}$$

4.107

A piston/cylinder contains butane, C_4H_{10} , at 300°C , 100 kPa with a volume of 0.02 m^3 . The gas is now compressed slowly in an isothermal process to 300 kPa .

- Show that it is reasonable to assume that butane behaves as an ideal gas during this process.
- Determine the work done by the butane during the process.

Solution:

$$\text{a) } T_{r1} = \frac{T}{T_c} = \frac{573.15}{425.2} = 1.35; \quad P_{r1} = \frac{P}{P_c} = \frac{100}{3800} = 0.026$$

From the generalized chart in figure D.1 $Z_1 = 0.99$

$$T_{r2} = \frac{T}{T_c} = \frac{573.15}{425.2} = 1.35; \quad P_{r2} = \frac{P}{P_c} = \frac{300}{3800} = 0.079$$

From the generalized chart in figure D.1 $Z_2 = 0.98$

Ideal gas model is adequate for both states.

$$\text{b) Ideal gas } T = \text{constant} \Rightarrow PV = mRT = \text{constant}$$

$$W = \int P dV = P_1 V_1 \ln \frac{P_1}{P_2} = 100 \times 0.02 \times \ln \frac{100}{300} = -2.2 \text{ kJ}$$

4.108

A cylinder fitted with a piston contains propane gas at 100 kPa, 300 K with a volume of 0.2 m³. The gas is now slowly compressed according to the relation $PV^{1.1} = \text{constant}$ to a final temperature of 340 K. Justify the use of the ideal gas model. Find the final pressure and the work done during the process.

Solution:

The process equation and T determines state 2. Use ideal gas law to say

$$P_2 = P_1 \left(\frac{T_2}{T_1} \right)^{\frac{n}{n-1}} = 100 \left(\frac{340}{300} \right)^{\frac{1.1}{0.1}} = \mathbf{396 \text{ kPa}}$$

$$V_2 = V_1 \left(\frac{P_1}{P_2} \right)^{1/n} = 0.2 \left(\frac{100}{396} \right)^{1/1.1} = 0.0572 \text{ m}^3$$

For propane Table A.2: $T_c = 370 \text{ K}$, $P_c = 4260 \text{ kPa}$, Figure D.1 gives Z .

$$T_{r1} = 0.81, P_{r1} = 0.023 \Rightarrow Z_1 = 0.98$$

$$T_{r2} = 0.92, P_{r2} = 0.093 \Rightarrow Z_2 = 0.95$$

Ideal gas model **OK** for both states, minor corrections could be used. The work is integrated to give Eq.4.4

$${}_1W_2 = \int P \, dV = \frac{P_2 V_2 - P_1 V_1}{1-n} = \frac{(396 \times 0.0572) - (100 \times 0.2)}{1 - 1.1} = \mathbf{-26.7 \text{ kJ}}$$

4.109

The gas space above the water in a closed storage tank contains nitrogen at 25°C, 100 kPa. Total tank volume is 4 m³, and there is 500 kg of water at 25°C. An additional 500 kg water is now forced into the tank. Assuming constant temperature throughout, find the final pressure of the nitrogen and the work done on the nitrogen in this process.

Solution:

The water is compressed liquid and in the process the pressure goes up so the water stays as liquid. Incompressible so the specific volume does not change. The nitrogen is an ideal gas and thus highly compressible.

$$\text{State 1:} \quad V_{\text{H}_2\text{O } 1} = 500 \times 0.001003 = 0.5015 \text{ m}^3$$

$$V_{\text{N}_2 } 1 = 4.0 - 0.5015 = 3.4985 \text{ m}^3$$

$$\text{State 2:} \quad V_{\text{N}_2 } 2 = 4.0 - 2 \times 0.5015 = 2.997 \text{ m}^3$$

$$\text{Process:} \quad T = C \text{ gives} \quad P_1 V_1 = mRT = P_2 V_2$$

$$P_{\text{N}_2 } 2 = 100 \times \frac{3.4985}{2.997} = \mathbf{116.7 \text{ kPa}}$$


Constant temperature gives $P = mRT/V$ i.e. pressure inverse in V for which the work term is integrated to give Eq.4.5

$$\begin{aligned} W_{\text{by N}_2} &= \int_1^2 P_{\text{N}_2} dV_{\text{N}_2} = P_1 V_1 \ln(V_2/V_1) \\ &= 100 \times 3.4985 \times \ln \frac{2.997}{3.4985} = \mathbf{-54.1 \text{ kJ}} \end{aligned}$$

4.110

Two kilograms of water is contained in a piston/cylinder (Fig. P4.110) with a massless piston loaded with a linear spring and the outside atmosphere. Initially the spring force is zero and $P_1 = P_o = 100 \text{ kPa}$ with a volume of 0.2 m^3 . If the piston just hits the upper stops the volume is 0.8 m^3 and $T = 600^\circ\text{C}$. Heat is now added until the pressure reaches 1.2 MPa . Find the final temperature, show the P - V diagram and find the work done during the process.

Solution:

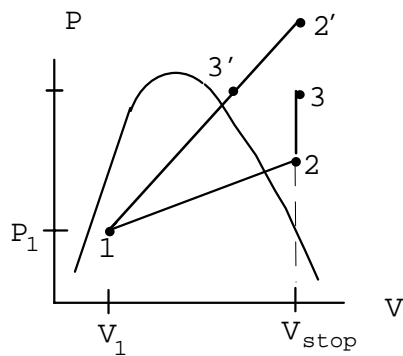

$$\text{State 1: } v_1 = V/m = 0.2 / 2 = 0.1 \text{ m}^3/\text{kg}$$

$$\text{Process: } 1 \rightarrow 2 \rightarrow 3 \text{ or } 1 \rightarrow 3'$$

$$\text{State at stops: } 2 \text{ or } 2'$$

$$v_2 = V_{\text{stop}}/m = 0.4 \text{ m}^3/\text{kg} \quad \& \quad T_2 = 600^\circ\text{C}$$

$$\text{Table B.1.3} \Rightarrow P_{\text{stop}} = 1 \text{ MPa} < P_3$$

$$\text{since } P_{\text{stop}} < P_3 \text{ the process is as } 1 \rightarrow 2 \rightarrow 3$$

$$\text{State 3: } P_3 = 1.2 \text{ MPa}, v_3 = v_2 = 0.4 \text{ m}^3/\text{kg} \Rightarrow T_3 \cong 770^\circ\text{C}$$

$$\begin{aligned} W_{13} &= W_{12} + W_{23} = \frac{1}{2}(P_1 + P_2)(V_2 - V_1) + 0 = \frac{1}{2}(100 + 1000)(0.8 - 0.2) \\ &= 330 \text{ kJ} \end{aligned}$$

4.111

A cylinder having an initial volume of 3 m^3 contains 0.1 kg of water at 40°C . The water is then compressed in an isothermal quasi-equilibrium process until it has a quality of 50%. Calculate the work done in the process splitting it into two steps. Assume the water vapor is an ideal gas during the first step of the process.

Solution: C.V. Water


$$\text{State 2: } (40^\circ\text{C}, x = 1) \text{ Tbl B.1.1 } \Rightarrow P_G = 7.384 \text{ kPa}, v_G = 19.52$$

$$\text{State 1: } v_1 = V_1/m = 3 / 0.1 = 30 \text{ m}^3/\text{kg} \quad (> v_G)$$

so $\text{H}_2\text{O} \sim$ ideal gas from 1-2 so since constant T

$$P_1 = P_G \frac{v_G}{v_1} = 7.384 \times \frac{19.52}{30} = 4.8 \text{ kPa}$$

$$V_2 = mv_2 = 0.1 \times 19.52 = 1.952 \text{ m}^3$$

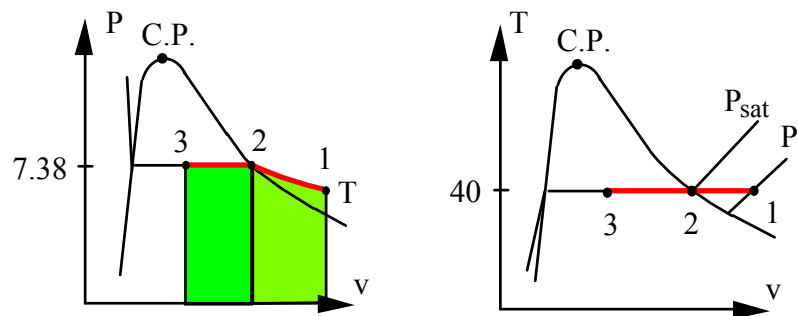

Process $T = C$: and ideal gas gives work from Eq.4.5

$${}_1W_2 = \int_1^2 P dv = P_1 V_1 \ln \frac{V_2}{V_1} = 4.8 \times 3.0 \times \ln \frac{1.952}{3} = -6.19 \text{ kJ}$$

$$v_3 = 0.001008 + 0.5 \times 19.519 = 9.7605 \Rightarrow V_3 = mv_3 = 0.976 \text{ m}^3$$

$P = C = P_g$: This gives a work term as

$${}_2W_3 = \int_2^3 P dv = P_g (V_3 - V_2) = 7.384(0.976 - 1.952) = -7.21 \text{ kJ}$$

Total work:

$${}_1W_3 = {}_1W_2 + {}_2W_3 = -6.19 - 7.21 = \mathbf{-13.4 \text{ kJ}}$$

4.112

Air at 200 kPa, 30°C is contained in a cylinder/piston arrangement with initial volume 0.1 m³. The inside pressure balances ambient pressure of 100 kPa plus an externally imposed force that is proportional to $V^{0.5}$. Now heat is transferred to the system to a final pressure of 225 kPa. Find the final temperature and the work done in the process.

Solution:

C.V. Air. This is a control mass. Use initial state and process to find T_2

$$P_1 = P_0 + CV^{1/2}; \quad 200 = 100 + C(0.1)^{1/2}, \quad C = 316.23 \Rightarrow$$

$$225 = 100 + CV_2^{1/2} \Rightarrow V_2 = 0.156 \text{ m}^3$$

$$P_2V_2 = mRT_2 = \frac{P_1V_1}{T_1} T_2 \Rightarrow$$

$$T_2 = (P_2V_2 / P_1V_1) T_1 = 225 \times 0.156 \times 303.15 / (200 \times 0.1) = 532 \text{ K} = 258.9^\circ\text{C}$$


$$\begin{aligned} W_{12} &= \int P \, dV = \int (P_0 + CV^{1/2}) \, dV \\ &= P_0(V_2 - V_1) + C \times \frac{2}{3} \times (V_2^{3/2} - V_1^{3/2}) \\ &= 100(0.156 - 0.1) + 316.23 \times \frac{2}{3} \times (0.156^{3/2} - 0.1^{3/2}) \\ &= 5.6 + 6.32 = \mathbf{11.9 \text{ kJ}} \end{aligned}$$

4.113

A spring-loaded piston/cylinder arrangement contains R-134a at 20°C, 24% quality with a volume 50 L. The setup is heated and thus expands, moving the piston. It is noted that when the last drop of liquid disappears the temperature is 40°C. The heating is stopped when $T = 130^\circ\text{C}$. Verify the final pressure is about 1200 kPa by iteration and find the work done in the process.

Solution:

C.V. R-134a. This is a control mass.

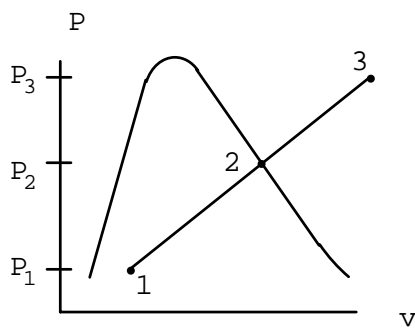

State 1: Table B.5.1 \Rightarrow

$$v_1 = 0.000817 + 0.24 \cdot 0.03524 = 0.009274$$

$$P_1 = 572.8 \text{ kPa,}$$

$$m = V / v_1 = 0.050 / 0.009274 = 5.391 \text{ kg}$$

Process: Linear Spring

$$P = A + Bv$$

$$\text{State 2: } x_2 = 1, T_2 \Rightarrow P_2 = 1.017 \text{ MPa, } v_2 = 0.02002 \text{ m}^3/\text{kg}$$

Now we have fixed two points on the process line so for final state 3:

$$P_3 = P_1 + \frac{P_2 - P_1}{v_2 - v_1} (v_3 - v_1) = \text{RHS} \quad \text{Relation between } P_3 \text{ and } v_3$$

State 3: T_3 and on process line \Rightarrow iterate on P_3 given T_3

$$\text{at } P_3 = 1.2 \text{ MPa} \Rightarrow v_3 = 0.02504 \Rightarrow P_3 - \text{RHS} = -0.0247$$

$$\text{at } P_3 = 1.4 \text{ MPa} \Rightarrow v_3 = 0.02112 \Rightarrow P_3 - \text{RHS} = 0.3376$$

Linear interpolation gives :

$$P_3 \cong 1200 + \frac{0.0247}{0.3376 + 0.0247} (1400 - 1200) = 1214 \text{ kPa}$$

$$v_3 = 0.02504 + \frac{0.0247}{0.3376 + 0.0247} (0.02112 - 0.02504) = 0.02478 \text{ m}^3/\text{kg}$$

$$W_{13} = \int P \, dV = \frac{1}{2} (P_1 + P_3) (V_3 - V_1) = \frac{1}{2} (P_1 + P_3) m (v_3 - v_1)$$

$$= \frac{1}{2} \cdot 5.391 (572.8 + 1214) (0.02478 - 0.009274) = \mathbf{74.7 \text{ kJ}}$$

4.114

A piston/cylinder (Fig. P4.114) contains 1 kg of water at 20°C with a volume of 0.1 m³. Initially the piston rests on some stops with the top surface open to the atmosphere, P₀ and a mass so a water pressure of 400 kPa will lift it. To what temperature should the water be heated to lift the piston? If it is heated to saturated vapor find the final temperature, volume and the work, ${}_1W_2$.


Solution:

(a) State to reach lift pressure of $P = 400$ kPa, $v = V/m = 0.1$ m³/kg

Table B.1.2: $v_f < v < v_g = 0.4625$ m³/kg

=> $T = T_{\text{sat}} = 143.63^\circ\text{C}$

(b) State 2 is saturated vapor at 400 kPa since state 1a is two-phase.

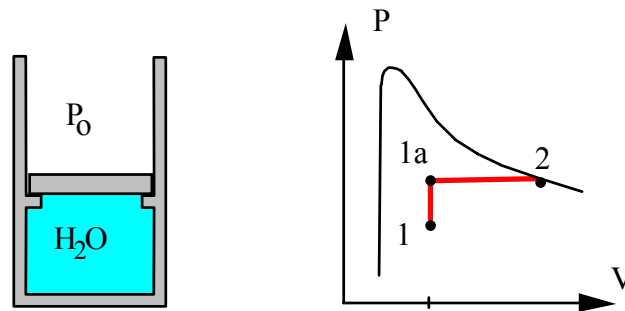

$$v_2 = v_g = 0.4625 \text{ m}^3/\text{kg}, \quad V_2 = m v_2 = 0.4625 \text{ m}^3,$$


Pressure is constant as volume increase beyond initial volume.

$${}_1W_2 = \int P \, dV = P (V_2 - V_1) = P_{\text{lift}} (V_2 - V_1) = 400 (0.4625 - 0.1) = 145 \text{ kJ}$$

4.115

Two springs with same spring constant are installed in a massless piston/cylinder with the outside air at 100 kPa. If the piston is at the bottom, both springs are relaxed and the second spring comes in contact with the piston at $V = 2 \text{ m}^3$. The cylinder (Fig. P4.115) contains ammonia initially at -2°C , $x = 0.13$, $V = 1 \text{ m}^3$, which is then heated until the pressure finally reaches 1200 kPa. At what pressure will the piston touch the second spring? Find the final temperature and the total work done by the ammonia.

Solution :

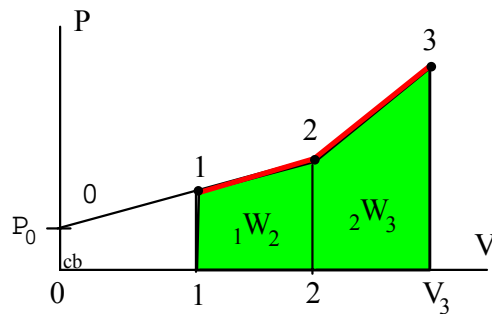

State 1: $P = 399.7 \text{ kPa}$ Table B.2.1

$$v = 0.00156 + 0.13 \times 0.3106 = 0.0419$$

At bottom state 0: 0 m^3 , 100 kPa

State 2: $V = 2 \text{ m}^3$ and on line 0-1-2

Final state 3: 1200 kPa, on line segment 2.

Slope of line 0-1-2: $\Delta P / \Delta V = (P_1 - P_0) / \Delta V = (399.7 - 100) / 1 = 299.7 \text{ kPa} / \text{m}^3$

$$P_2 = P_1 + (V_2 - V_1) \Delta P / \Delta V = 399.7 + (2 - 1) \times 299.7 = \mathbf{699.4 \text{ kPa}}$$

State 3: Last line segment has twice the slope.

$$P_3 = P_2 + (V_3 - V_2) 2 \Delta P / \Delta V \Rightarrow V_3 = V_2 + (P_3 - P_2) / (2 \Delta P / \Delta V)$$

$$V_3 = 2 + (1200 - 699.4) / 599.4 = 2.835 \text{ m}^3$$

$$v_3 = v_1 V_3 / V_1 = 0.0419 \times 2.835 / 1 = 0.1188 \Rightarrow T = \mathbf{51^\circ\text{C}}$$


$$\begin{aligned} {}_1W_3 &= {}_1W_2 + {}_2W_3 = \frac{1}{2} (P_1 + P_2) (V_2 - V_1) + \frac{1}{2} (P_3 + P_2) (V_3 - V_2) \\ &= 549.6 + 793.0 = \mathbf{1342.6 \text{ kJ}} \end{aligned}$$

4.116

Find the work for Problem 3.101.

A piston/cylinder arrangement is loaded with a linear spring and the outside atmosphere. It contains water at 5 MPa, 400°C with the volume being 0.1 m³. If the piston is at the bottom, the spring exerts a force such that $P_{\text{lift}} = 200$ kPa. The system now cools until the pressure reaches 1200 kPa. Find the mass of water, the final state (T_2, v_2) and plot the P - v diagram for the process.

Solution :

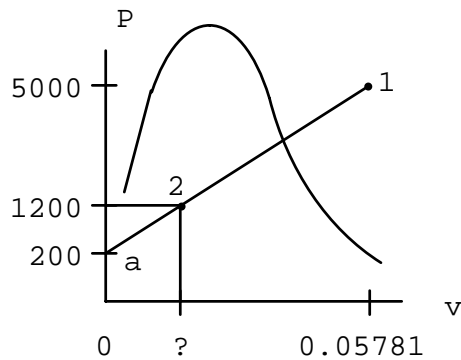

$$1: 5 \text{ MPa}, 400^\circ\text{C} \Rightarrow v_1 = 0.05781 \text{ m}^3/\text{kg}$$

$$m = V/v_1 = 0.1/0.05781 = 1.73 \text{ kg}$$

$$\text{Straight line: } P = P_a + Cv$$

$$v_2 = v_1 \frac{P_2 - P_a}{P_1 - P_a} = \mathbf{0.01204 \text{ m}^3/\text{kg}}$$

$$v_2 < v_g(1200 \text{ kPa}) \text{ so two-phase } T_2 = \mathbf{188^\circ\text{C}}$$

$$\Rightarrow x_2 = \frac{v_2 - 0.001139}{0.1622} = 0.0672$$

The P - V coordinates for the two states are then:

$$P_1 = 5 \text{ MPa}, V_1 = 0.1 \text{ m}^3, P_2 = 1200 \text{ kPa}, V_2 = mv_2 = 0.02083 \text{ m}^3$$

$$P \text{ vs. } V \text{ is linear so } {}_1W_2 = \int PdV = \frac{1}{2} (P_1 + P_2)(V_2 - V_1)$$

$$= \frac{1}{2} (5000 + 1200)(0.02083 - 0.1) = \mathbf{-245.4 \text{ kJ}}$$